

Cluster B4-FC

3200K, Peak

Report Summary




Measurement Summary:

Photometrical Parameters	Optical Parameters	Electrical Parameters
Fixture Output: 22952 lm/ 27228 cd	Beam Angle (50%): 51,1°	AC Supply: 223 V/ 50,0 Hz
Fixture Efficiency: 91,7 lm/W	Field Angle (10%): 92,9°	Power: 782 W
	Cutoff Angle (2,5%): 110,5°	Current: 3,73
Color Temperature: 3406		Power Factor: 0,940
CRI: 88,5		
CRI R9 Value: 73,3		
CQS: 87,7		
TLCI: 57,5		
TM-30 Rf: 89,1}		
TM-30 Rg: 106		


Cluster B4-FC

3200K, Peak


Distribution Diagram:

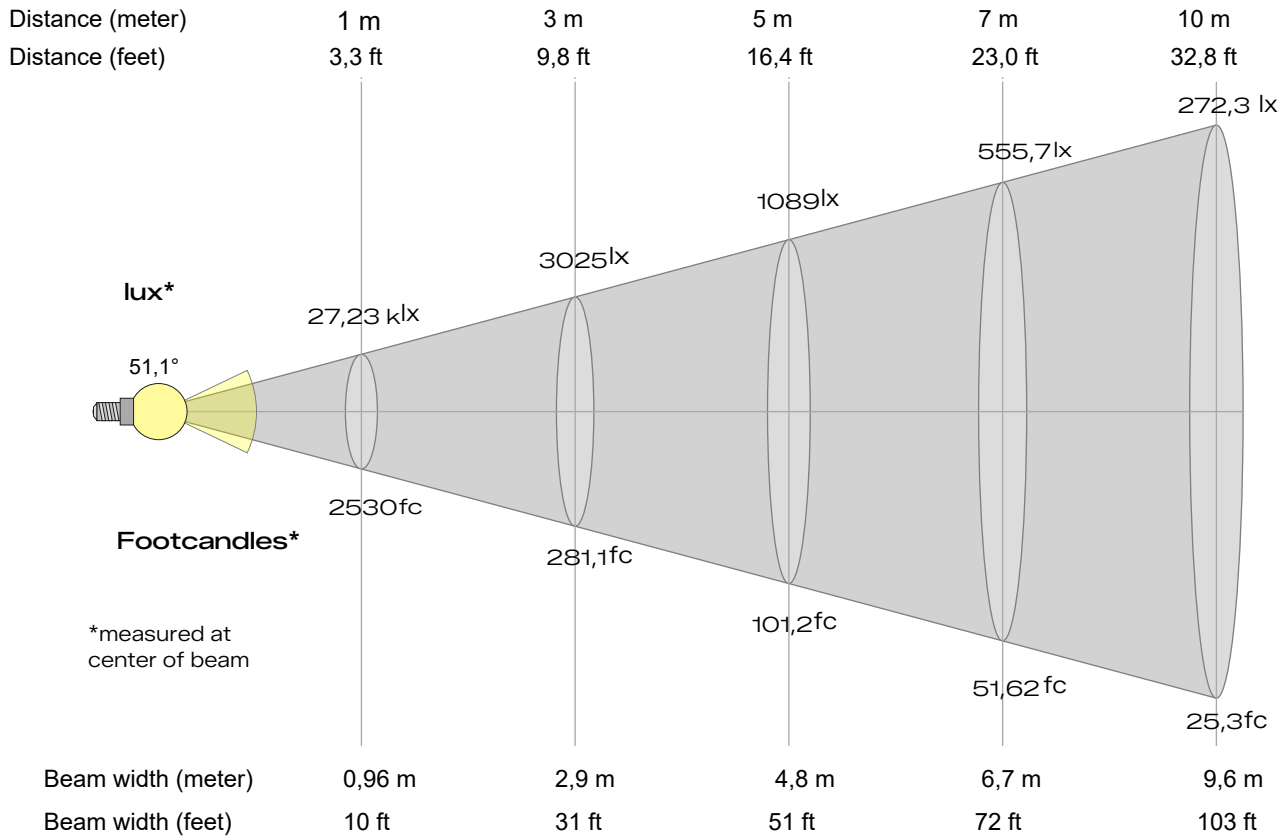

Beam Angle:

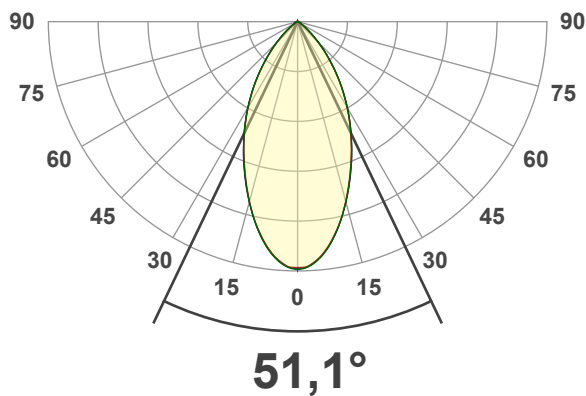



Field Angle:

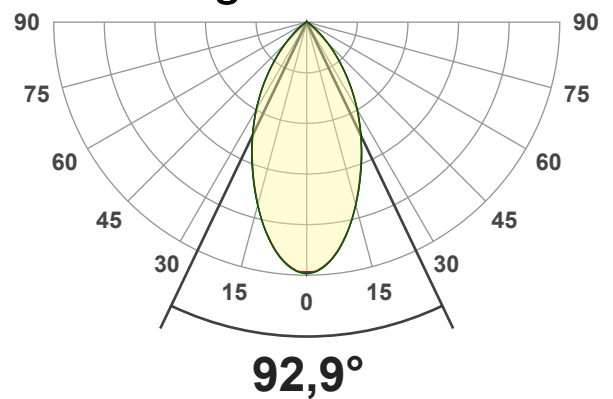

Cluster B4-FC

3200K, Peak

CIE 1931 Color Space Diagram:

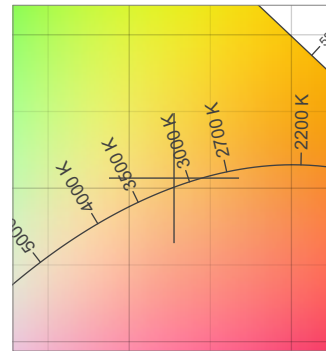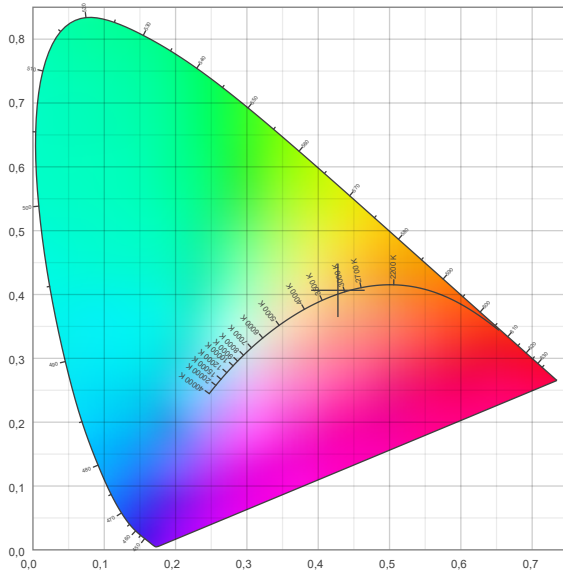

x: 0,411 y: 0,394

3406 K

Light Quality Parameters:	Values:
Color Temperatur:	3406 K
uv:	0,000
CRI	88,5
CQS:	87,7
TLCI:	57,5
TM30 - Rf:	89,1
TM30 - Rg:	106