

Cluster B4-FC

RAW, Peak

Report Summary




Measurement Summary:

Photometrical Parameters	Optical Parameters	Electrical Parameters
Fixture Output: 26049 lm/ 30892 cd	Beam Angle (50%): 51,4°	AC Supply: 223 V/ 50,0 Hz
Fixture Efficiency: 91,4 lm/W	Field Angle (10%): 93,0°	Power: 815 W
	Cutoff Angle (2,5%): 111,0°	Current: 3,88
Color Temperature: 5772		Power Factor: 0,942
CRI: 92,9		
CRI R9 Value: 78,1		
CQS: 93,9		
TLCI: 80,7		
TM-30 Rf: 91,9}		
TM-30 Rg: 107		


Cluster B4-FC

RAW, Peak


Distribution Diagram:

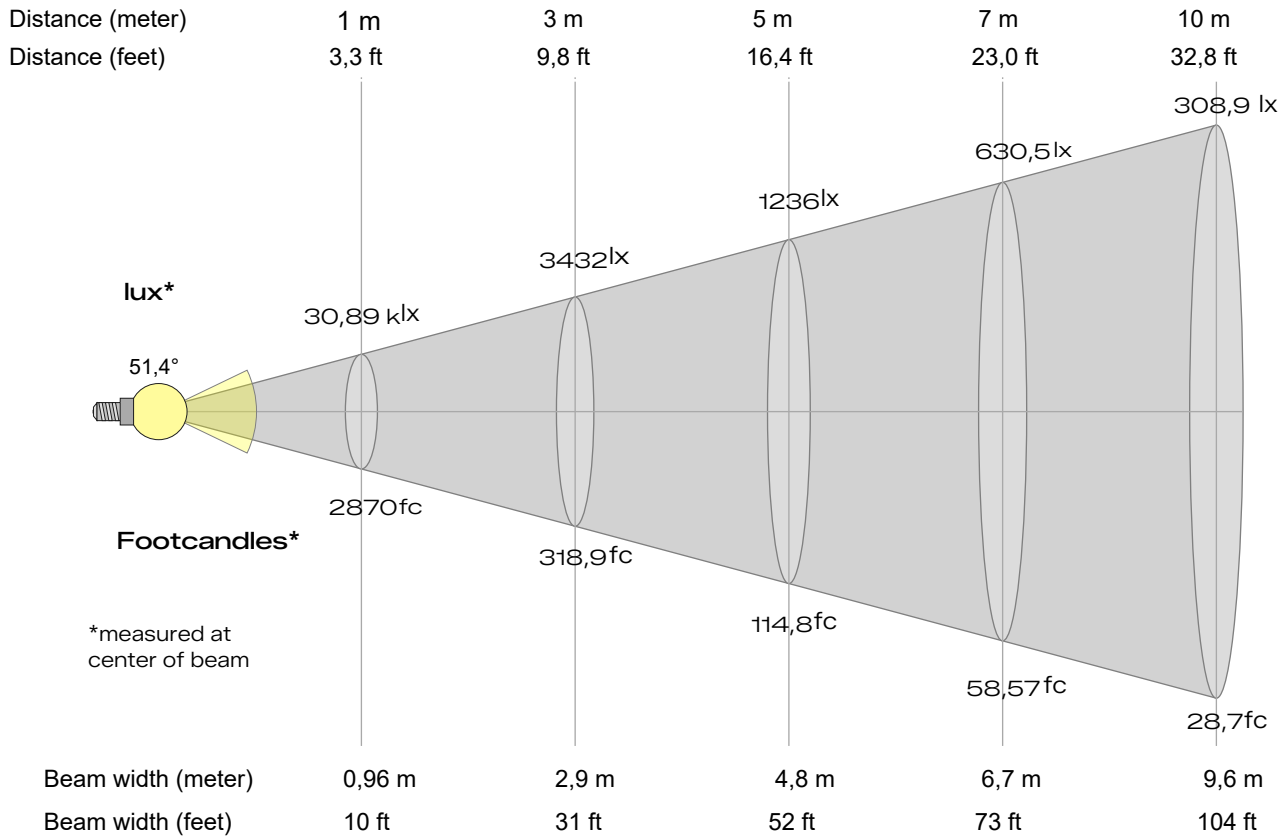

Beam Angle:

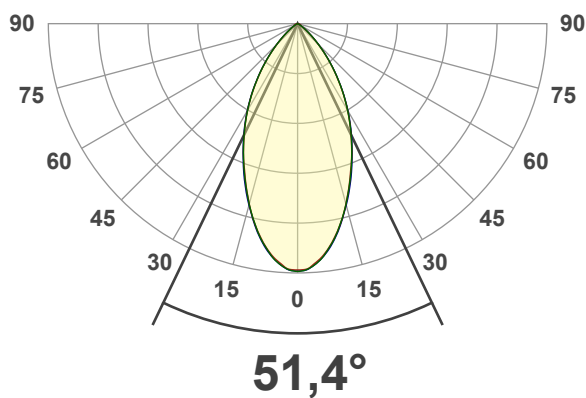



Field Angle:

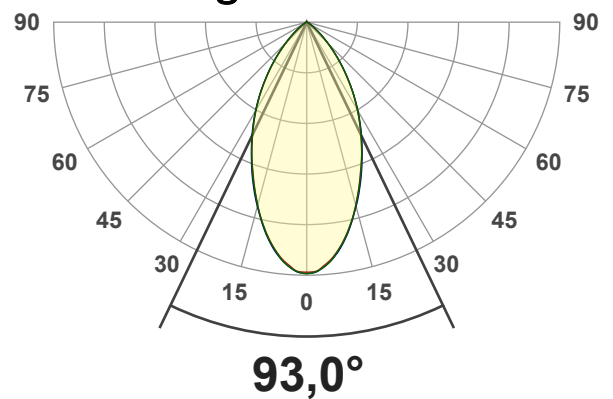

Cluster B4-FC

RAW, Peak

CIE 1931 Color Space Diagram:

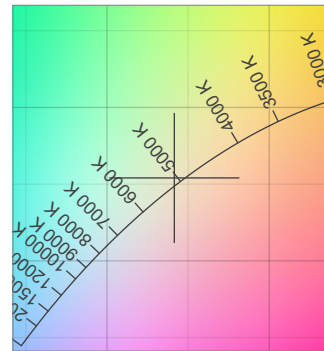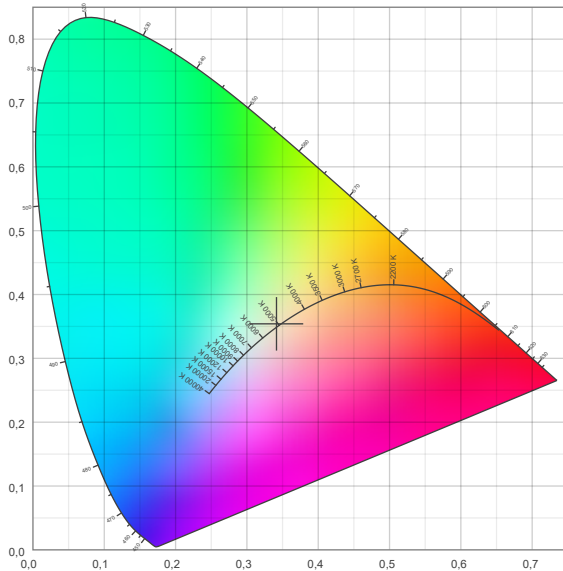

x: 0,327 y: 0,340

5772 K

Light Quality Parameters:	Values:
Color Temperatur:	5772 K
uv:	0,002
CRI	92,9
CQS:	93,9
TLCI:	80,7
TM30 - Rf:	91,9
TM30 - Rg:	107