

ROXX NEOi mini



USER MANUAL

CONTENT

1. Safety Informations

1.1. General Preventive Measures	4
1.2. Regulations for equipment that connects to power mains	5
1.3. Technical warnsigns and explanation	6

2. Introduction

2.1. About us	7
2.2. NEOi mini	7

3. General Product Information

3.1. Scope of delivery	8
3.2. Control Functions	8
3.3. Features	8

4. Installation & Setup

4.1 Physical Installation and Rigging	9
4.2 Connections	10
4.2.1. AC Power	10
4.2.2. DMX Connection	10
4.2.2.1. Cable Connection	11
4.2.3.2. Wireless Connection	11
4.3 NFC (Near Field Communication)	12

5. Operation

5.4 Configuration	12
5.4.1 Set DMX Start Address	12
5.4.2 Selecting DMX Mode	12
5.4.3 Stand Alone	13
5.4.4 Settings	16
5.4.4.1 Reset functions	19
5.4.5 System Info	20

6. Accessories

6.1. Accessories	21
6.2. Accessories-Filters	21

7. Technical Data / Diagrams

7.1 Technical drawings and measurements	22
7.2 IP Rating	23
7.3 Technical Data	24
7.4 Section Chart / DMX-Charts / Color Macro Charts / CCT Chart	26
7.5 RDM Templates	45

8. Troubleshooting	46
---------------------------	-----------

9. Manufacturer's Declaration	47
--------------------------------------	-----------

1. SAFETY INFORMATION

1.1. General Preventive Measures

- 1.1.1. Please read, understand and follow the instructions.
- 1.1.2. Store the instructions and information in a safe place.
Best solution is the ring binder provided by ROXX.
- 1.1.3. Follow all safety warnings. Under no circumstances remove safety warnings or other information from the equipment.
- 1.1.4. Don't use the equipment for any other intended purpose or manner.
- 1.1.5. Use only stable and compatible stands and/or brackets. Especially when fix installed.
Make sure the wall brackets are properly installed and safe. Make sure the device is securely installed and cannot fall.
- 1.1.6. Check the safety regulations applying for your country before and during installation.
- 1.1.7. Keep the device away from heat! Don't place/install near heaters, ovens or any source of heat.
Make sure that the device always is efficiently cooled and cannot overheat.
- 1.1.8. Always guarantee that ventilation and cooling slots are clean and not blocked.
- 1.1.9. Item must be away minimum 20cm from anything around and above it.
- 1.1.10. Do not use this device close to water.
- 1.1.11. Do not expose this equipment to flammable materials.
- 1.1.12. Make sure that no objects can fall into the device.
- 1.1.13. Only use this device with the accessories recommended by the manufacturer.
- 1.1.14. Always check the equipment for housing damages, so that no water can enter the device.
No containers containing liquids of any kind should be place on top of the unit.
- 1.1.15. Opening or modifying this device is only allowed by authorized and qualified persons.
- 1.1.16. All cables need to be checked after connecting the device in order to prevent damage or accidents.
- 1.1.17. Make sure that the device is transported safe and packed proper in order to prevent damage of any kind.
- 1.1.18. Once you notice improper function of your device due to damage, electric shock or anything similar, immediately unplug the unit from the mains outlet and contact our service department.
- 1.1.19. Clean the device with a dry cloth.

- 1.1.20. Observe all disposal laws applicable in your country. Especially for the packaging.
- 1.1.21. Plastic bags are not a toy! Keep away from children!
- 1.1.22. Please note that changes or modifications which are not approved by the party responsible for compliance will void the user's authority to operate the device.

1.2 Regulations for equipment that connects to power mains

- 1.2.1. If an earthing contact is available in the used power cord, it must be used in combination with a power outlet, providing a protective ground. In no circumstances should the protective ground be deactivated.
- 1.2.2. Do not switch on the device immediately after it has been in strong different temperatures, especially after transport. Let the device acclimatize to the temperature in the room of usage first to prevent moisture and condensation.
- 1.2.3. Verify that the correct voltage and frequency are available in the area of operation, before connecting the unit to the mains outlet.
- 1.2.4. If the plug doesn't fit in your mains outlet, contact your electrician.
- 1.2.5. Make sure your power cord/adaptor/connector does not show signs of kinks/warps or is being stepped on.
- 1.2.6. Always disconnect the unit when not in use or being cleaned. Don't pull on the cord to disconnect. Only touch power connections with dry hands!
- 1.2.7. Don't switch the unit on/off rapidly. This may cause damage.
- 1.2.8. If a fuse needs to be replaced, ALWAYS make sure that exactly the same fuse will be used (type and rating). Repeatedly blown fuses need to be checked by an authorised service technician.
- 1.2.9. In the risk of lightning strike all units need to be unplugged from the mains in order to prevent damage.
- 1.2.10. During installation there must be a voltage free condition.
- 1.2.11. The device needs to be cleaned and serviced regularly and will credit this with a longer life cycle. Dust, dirt, moist, water, smoke, nicotine or anything similar inside the unit will cause damage/malfunction.
- 1.2.12. The unit needs to have at least 0,5m distance to anything flammable.
- 1.2.13. You have to make sure that any electrical installation applies to the laws of your country. Correct power cables and applying standards have to be used.

1.3. Technical warnsigns and explanation



In order to prevent the risk of an electric shock, under no circumstances remove the cover/back or open the unit in any way! No user serviceable parts are inside. Service, maintenance and repairs should only be done by qualified service personnel or the manufacturer.



Dangerous uninsulated voltage inside the device can cause an electrical shock when opened by unqualified personnel.



Important operating and maintenance instructions apply!



Do not operate this device in tropical climates.



CAUTION! Intense LED light source! Risk of eye damage. Do not look into the light source



The housing surface of the spotlight can heat up to temperatures as high as 70 °C in regular use. Ensure that it is not possible to come into contact with the housing unintentionally. Always allow sufficient time for the lamp to cool down before dismantling, carrying out maintenance work or charging etc..



IMPORTANT INFORMATION!

- This is a product which has been developed for professional usage in event technology. It is not suitable as a household lighting.
- NEVER stare, not even temporarily, directly into the light source.
- Don't use magnifiers or any other optical instrument to look at the beam.
- The effects of this device, especially the stroboscope effect, can cause problems for sensitive people or may even cause epileptical seizures.

2. INTRODUCTION

2.1. About us

The name ROXX® came easily.

Combined with the concentrated knowledge and many years of experience, our three founders, who have been leaving their mark in the event and lighting industry for many years already, came together in 2020 to start this outstanding venture.

Product development, sales and marketing as well as the exceptional know-how and the profound rooting in the field of the professional lighting technology belong to our core competences and therefore guarantee extremely innovative and reliable products, excellent support and professional service in every aspect.

Designed & developed in Germany

ROXX® products are developed and designed in Germany. Always in tight consultation with our customers and experts who will eventually be working with these tools. This ensures innovative, easy-to-use and performance-oriented solutions, which provide added value for our customers.

Made to last

Recommended for permanent outdoor use, most ROXX® products feature additional corrosion protection and enhanced IP66 equipment protection, thereby providing that crucial extra for a wider range of applications. In addition to architectural or theme park applications, even fixed installations in coastal or offshore areas with high salt exposure can be reliably implemented over long periods of time.

2.2. NEOi mini

The NEOi mini is purpose-built for challenging environments where durability meets performance. Designed with resilience in mind, the NEOi mini is IP66-certified, offering full protection against dust and powerful water jets, making it ideal for outdoor applications. Its IK09 impact resistance and 3G vibration rating provide unparalleled reliability, even in high-stress settings like architectural lighting, coastal areas, and industrial locations.

Encased in a sleek RAL 9010 white housing with a premium C5H coating, the NEOi mini combines strength and elegance. The body is constructed from high-grade aluminum, durable nylon, and stainless steel, all carefully selected for maximum longevity in harsh environments. With all exterior screws crafted from stainless steel, corrosion resistance is built into every detail. This fixture's display-free design further enhances its resilience, with all settings conveniently controlled via the ROXX NFC app.

The NEO i's flexibility is expanded with the Omega Bracket STi, ensuring secure mounting and smooth integration into various setups, complete with M10 stainless steel screws and washers. Supported by a 5-year warranty, the NEOi mini is built to last, making it a trusted choice for large-scale installations and high-impact architectural projects. For professionals who require additional customization, the NEOi mini offers optional internal filters and a range of accessories that adapt to any application need.

3. GENERAL PRODUCT INFORMATION

3.1. Scope of delivery


⊖ 1x NEOi mini

We're offering a wide range of professional accessories (optional). Please see under menu 6 or at our website www.roxxlight.com

3.2. Control Functions

- 3CH CCT, 3CH RGB, 6CH RGB, 8CH RGB, 11CH RGB, 15CH RGB, 4CH DIRECT, 8CH DIRECT, 9CH DIRECT, 12CH DIRECT, 17CH DIRECT, 10CH HSI
- Stand Alone Functions including cinema effects, various auto programs, customisable scenes, CCT, LEE adjusted color macros and custom color templates
- Master & Slave (by DMX and Wireless DMX optional)
- Wireless DMX (Lumenradio CRMX®) optional
- ROXX App - Bluetooth 5.0 optional
- ROXX NFC App - Near Field Communication


3.3. Features

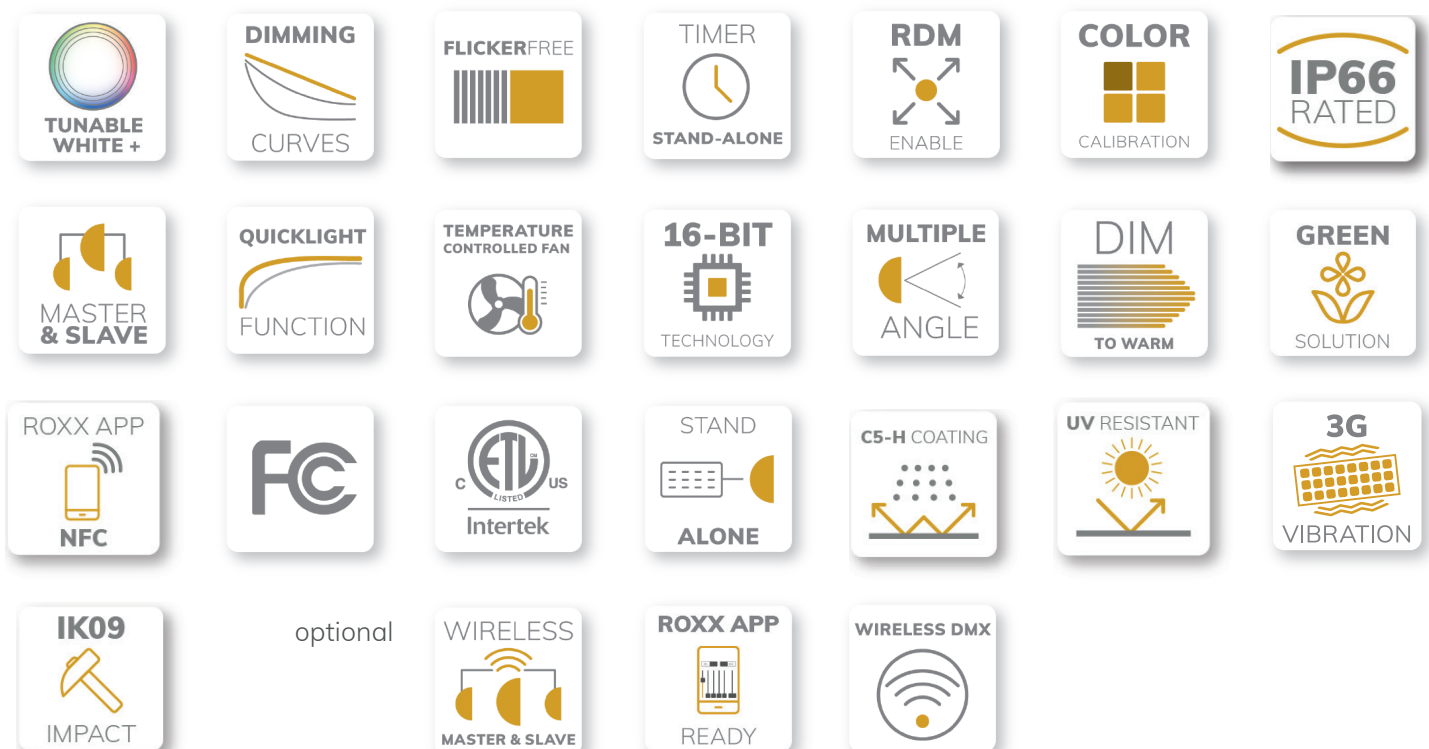

4. INSTALLATION & SETUP

4.1 Physical Installation and Rigging

ROXX NEOi mini may be installed in any orientation. For this purpose the product provides several options:

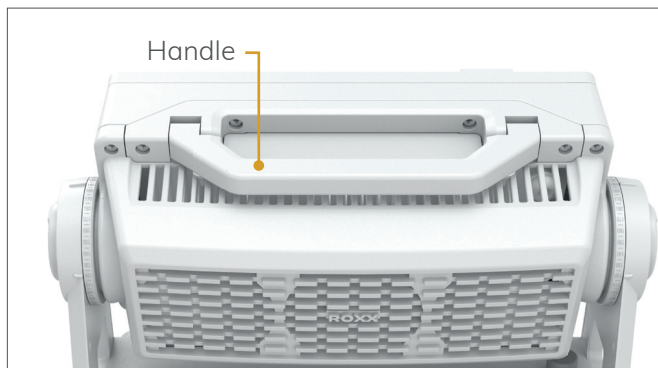


Standing:

The fixture is equipped with 4 rubber feet. It allows the luminaire to be used in floor application. With its integrated rubber feet it's designed to ensure a secure stand on every plane surface with 220° tilt movement of the fixtures head.

Hanging:

On the bottom 2x M10 stainless steel threads are pre-installed. Here it's possible to screw in the ROXX Omega Bracket STi (optional accessory) equiped with any suitable clamp.

4.2 Connections*

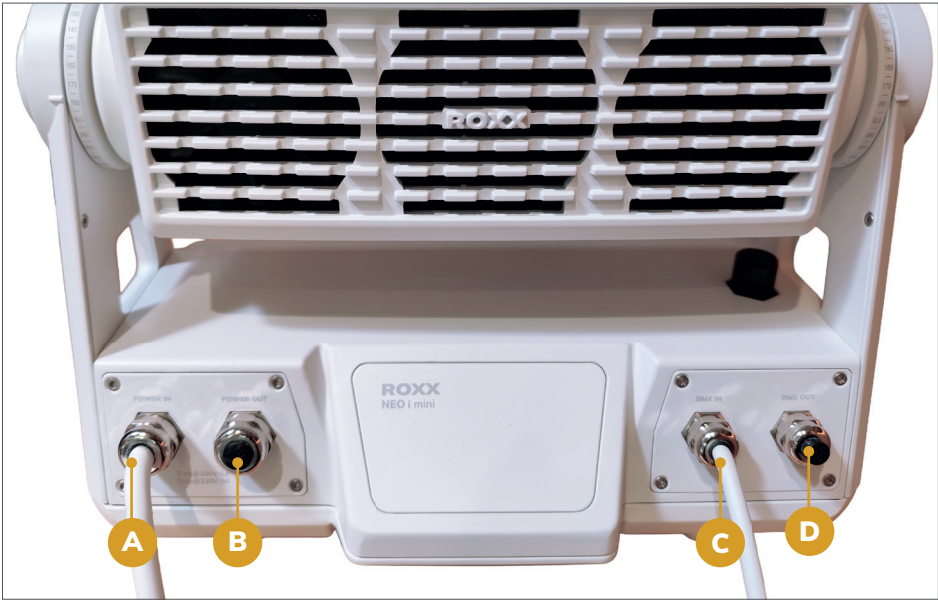

- A:** IP66 Power IN connectors with 3m power cord (white), open ends and cable ferrules
Connect using the provided power cable (when not in use, always close with rubber sealing cap)
- B:** IP66 Power OUT connectors with rubber sealing cap.
Connect using the provided power cable (when not in use, always close with rubber sealing cap)
- C:** IP66 PG9 for DMX I/O, 3m cable (white)
- D:** IP66 PG9 for DMX Out with rubber sealing cap

4.2.1. AC Power

The NEOi mini operates on any 100–260 V, 50/60 Hz AC mains power supply with a maximum power consumption of 688W @ 230V. Connect the fixture to AC power using the supplied cable or a similar one to ensure the correct ingress protection (IP).
For temporary installations, the mains cable must be fitted with a grounded connector intended for exterior use. The fixture must be grounded/earthed and be able to be isolated from AC power. The AC power supply must incorporate a fuse or circuit breaker for fault protection.

Wire Color (EU models)	Wire Color (US models)	Conductor	Symbol
Brown	Black	Live	L
Blue	White	Neutral	N
Yellow / Green	Green	Ground (earth)	⊕ or ⊥



Warning!

Read “Safety Informations” starting on page 3 before connecting the fixtures to AC mains power!
Do not connect the fixture to an electrical dimmer system, as doing so may cause damage that is not covered by the product warranty!

4.2.2 DMX Connection


The NEOi mini is fully controllable by DMX (USITT DMX512-A standard, based on RS-485) and RDM. It can be connected using either DMX cables or via the built-in LumenRadio CRMX wireless system if installed (optional).

4.2.2.1. DMX Cable Connection

Use shielded twisted pair cable designed for RS-485 devices. The cables are daisy chained between the fixtures, and up to 32 fixtures can be connected to the same DMX link. Up to 300 meters (1000ft.) of cable is achievable with high quality DMX cables. All DMX links must be terminated in the last fixture Standard microphone cable is not suitable for transmitting DMX.

DMX Termination on last fixture DMX out

Wiring guide



Wire	Color	Conductor
	Black	Ground
	White	DMX IN: Data -
	Red	DMX IN: Data +
	Blue	DMX OUT: Data -
	Green	DMX OUT: Data +

4.2.3.2. Wireless Connection*

NEOi mini can be optional equipped with a LumenRadio™ Transceiver module.

This enables the fixture to work with the following connectivity options:

- ⊕ Working in Receiver Mode: receive wireless DMX- and RDM Signals via CRMX
- ⊕ Working in Transmitter Mode: transmit DMX (1 universe) to other units via CRMX
- ⊕ Full Control via Bluetooth 5.0 and ROXX App

The Fixture is able to send DMX-data received by CRMX or Bluetooth to its physical DMX-Output and hereafter to any DMX-capable unit. For this please enable "Pass to DMX Out" inside Wireless DMX Settings.

NEOi mini can act as a fully operative CRMX Receiver and be paired to an active wireless transmitter (CRMX) simultaneously as being connected to a cabled DMX. The device will prioritize cabled DMX input over wireless DMX and over Bluetooth.

If using a wireless DMX system, ensure that the DMX input and the DMX in/output are properly sealed.

***Note: If you are using XLR for DMX and not Bluetooth we recommend to not connect to Bluetooth unless you need to since it can cause a few dropped DMX packets.**

BLE and CRMX RX are not available simultaneously

- If CRMX RX is enabled and BLE will enabled after, CRMX automatically changes to TX mode.
- If CRMX TX operating mode is changed to RX, BLE will be disabled automatically.

4.3. NFC (Near Field Communication)

NEOi mini integrates a NFC chip (Near Field Communication) and allows in conjunction with ROXX NFC App to address and configure the fixtures wirelessly even when the fixture power is not prevent. Additionally, the fixtures firmware can be read out and updated to latest version. For this please make sure NEOi mini stays AC powered during update process.

The NFC chip is based on it's lower housing part, close to the CRMX antenna. To get a proper connection between your mobile phone and NEOi mini, please make sure that your phone is very close to the NFC.





5.4 Configuration via RDM or NFC app (similar)

5.4.1 Set DMX Start Address

5.4.2 Selecting DMX Mode*

***Note:**

For detailed information about the several DMX modes including channel assignment please see our DMX Control chart.

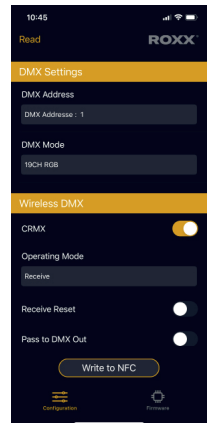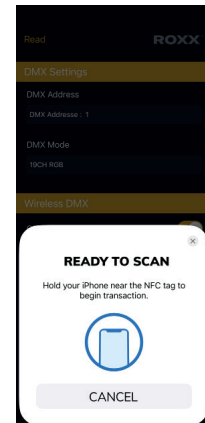

Level 1

Menu
DMX Mode
Stand Alone
Settings
System Info

Level 2

DMX Mode
3CH CCT
3CH RGB
6CH RGB
8CH RGB
11CH RGB
15CH RGB
4CH DIRECT
8CH DIRECT,
9CH DIRECT
12CH DIRECT
17CH DIRECT
10CH HSI

5.4.3 Stand Alone*

To finally use Stand Alone programs please make sure either DMX, CRMX RX or BLE is connected to the fixture, as these protocols have priority.

Stop Stand Alone

To stop a running Stand Alone mode immediately, please select "Stop Stand Alone" and confirm by pressing ENTER.

Level 1

Menu
DMX Mode
➤ Stand Alone
Settings
System Info

Level 2

Stand Alone Mode
➤ Stop Stand Alone
Auto
Color Macro
Quick Color
Tunable White

Auto

Level 1

Menu
DMX Mode
➤ Stand Alone
Settings
System Info

Level 2

Stand Alone Mode
Stop Stand Alone
➤ Auto
Color Macro
Quick Color
Tunable Whites

Level 3

Auto
➤ Stop Program
7-Color Fade
7-Color Jump
15-Color Fade
15-Color Jump.....
Police RB
Police B
Candle Light
Fireworks
Red Carpet
Welding

Level 4

Program
➤ Speed <0-100>
(Default 50)
Dim <0-100>

Color Macro

46 different color macros (34x matched LEE color filters, 6 LED colors and 6 different Whites) are available as presets. For each the brightness can be adjusted separately.

Level 1

Menu
DMX Mode
➤ Stand Alone
Settings
System Info

Level 2

Stand Alone Mode
Stop Stand Alone
Auto
➤ Color Macro
Quick Color
Tunable White

Level 3

Color Macro
Color Off
➤ Color Macros
Color Macro Chart
Dim <0-100>

Level 4

Gels - Color Macros for Standalone Mode			Gels - Color Macros for Standalone Mode			Gels - Color Macros for Standalone Mode		
Pos.	Gel Name	Color Number	Pos.	Gel Name	Color Number	Pos.	Gel Name	Color Number
1	Red	100% Red LED	15	Primary Green	LEE 139	31	Mauve	LEE 126
2	Fire	LEE 019	16	Jas Green	LEE 738	32	Smokey Pink	LEE 127
3	Medium Red	LEE 027	17	jade	LEE 323	33	Special Med Lavender	LEE 343
4	Primary Red	LEE 106	18	Blue	100% Blue LED	34	Ultimate Violet	LEE 707
5	Med Amber	LEE 020	19	Sky Blue	LEE 068	35	Magical Magenta	LEE 795
6	Dark Amber	LEE 022	20	Tokyo Blue	LEE 071	36	Chrysalis Pink	LEE 798
7	Deep Amber	LEE 104	21	Light Blue	LEE 118	37	Specia KH Lavender	LEE 799
8	Orange	LEE 105	22	Marine Blue	LEE 131	38	Bulb White	2700K / High CRI
9	Deep Golden Amber	LEE 135	23	Med Blue	LEE 132	39	Halogen White	3200K / High CRI
10	Yellow	LEE 101	24	Congo Blue	LEE 181	40	Neutral White	4200K / High CRI
11	Green	100% Green LED	25	Mikkel Blue	LEE 716	41	Daylight White	5600K / High CRI
12	Lime Green	LEE 088	26	Rose Pink	LEE 002	42	Cold White I	6000K / High CRI
13	Moss Green	LEE 089	27	Med Pink	LEE 036	43	Cold White II	6300K / High CRI
14	LEE Green	LEE 121	28	Light Lavender	LEE 052	44	Amber (only if available)	100% Amber LED
			29	Lavender	LEE 058	45	Lime (only if available)	100% Lime LED
			30	Magenta	LEE 113	46	Cyan (only if available)	100% Cyan LED

Quick Color

The standalone mode “Quick Color” allows a direct adjustment of the single LED colors R, G, B, L, Dimmer and Shutter.

Level 1

Menu
DMX Mode
■ Stand Alone
Settings
System Info

Level 2

Stand Alone Mode
Stop Stand Alone
Auto
Color Macro
■ Quick Color
Tunable White

Level 3

Quick Color	
Dimmer	<0-100>
Shutter	<0-255>
Red	<0-255>
Green	<0-255>
Blue	<0-255>
Lime	<0-255>

Tunable White

The standalone mode “Tuneable White” allows the color temperature (CCT) to be adjusted from 2.000K – 10.000K in 100K steps. Besides brightness and shutter also a +/- green and magenta correction is available.

Level 1

Menu
DMX Mode
➤ Stand Alone
Settings
System Info

Level 2

Stand Alone Mode
Stop Stand Alone
Auto
Color Macro
Quick Color
➤ Tunable White

Level 3

Tunable White
CCT <2000K-10.000>
TINT <000> (+/-127)
Dimmer <0-255>
Shutter <0-255>

5.4.4 Settings

Level 1

Menu
DMX Mode
Stand Alone
Settings
➡ System Info


Main Menu	Menu level 2	Menu level 3	Menu level 4	Description
Settings	Wireless DMX (only appears if optional CRMX module is built inside)	CRMX	<on/off>	On=CRMX enabled / Off= CRMX disabled
		Operating Mode	<receive/transmit>	Receive= CRMX module as Receiver Transmit= CRMX module as Transmitter
		Transmit Link	<no/yes>	Yes= pair with CRMX devices. CRMX must be activated on all devices and the pairing must be picked up by a transmitter (Receive Reset). No= Linking disabled
		Receive Reset	<no/yes>	Yes = retain transmitter pairing No = do not retain transmitter pairing
		Pass to DMX Out	<no/yes>	Yes= incoming wireless DMX and BLE signal will be passed to wired DMX out No= incoming wireless DMX and BLE signal will not be passed to wired DMX out
		Signal Strength	0-100	CRMX signal strength
		BLE	<on/off>	On= BLE enabled / Off= BLE disabled
		BLE Link	<no/yes>	Link = starts bluetooth advertising for at least 1 minute
		BLE Password	<000000>	Set 6-digits user Password for connection to your mobile device (ROXXAPP)
	Protocol	DMX		enables DMX protocol
		Slave		Confirm with ENTER, after Slave Mode is activated Display will show Slave Mode. Connect the master and slave units (same model) with either DMX cable or Wireless DMX (set Master to Transmit mode, Slave to Receive mode) and enable one of the standalone modes on the master unit (Auto, Quick Color).
	Startup Mode (using last adjustments of specific Standalone Modes)	Hold		Select your default operating mode when fixture is powered on
		DMX		
		Auto		
		Color Macro		
		Quick Color		
		Tunable White		
	DMX Fail	Hold (factory default)		Hold= last command retains
		Blackout		Blackout= Activates Blackout
		Emergency Light		Emergency Light= Fixtures changes to 5600K

Main Menu	Menu level 2	Menu level 3	Menu level 4	Description
Settings	Dimmer Curve	Linear		Linear= Light intensity increases linear with DMX value
		Exponential		Exponential= Light intensity can be set more smooth at lower DMX values and broadly at higher DMX values.
		Logarithmic		Light intensity can be broadly adjusted at lower DMX values and more smooth at higher DMX values
		S-Curve		Light intensity can be adjusted smoothly at lower and higher DMX values and broadly at medium DMX values
	Dimmer Response	LED		The LED responds abruptly to it's DMX values
		Halogen		The LED responds similar to a halogen fixture with soft changes at brightness.
	Color Calibration	Normal CRI		
		High CRI		
	RAW Balance (affects RAW Mode in DMX and Stand-alone control)	User Calibration	Red <0- 255 >	Individual color calibration for R,G,B,L
			Green <0- 255 >	
			Blue <0- 255 >	
			Lime <0- 255 >	
	LED Frequency	800 Hz	Select preferred LED PWM frequency	
		1200 Hz		
		2000 Hz		
		3600 Hz		
		12000 Hz		
		25000 Hz		
	Fan	Auto 1		Adjust fan speed relative to internal fixture temperature, maximum 2500rpm
		Auto 2		Adjust fan speed relative to internal fixture temperature, maximum 3000rpm
		Silent		Low fan speed for silent operation, maximum 1800rpm
		Studio		Low fan speed for silent operation, maximum 1500rpm
		Fan Off		Fan Off
		Max Power		High fan speed for maximum cooling effect, maximum 3000rpm
	Redshift	On / Off	On= Activates Redshift, Off= Deactivates Redshift	Redshift function simulate traditional halogen fixtures while dimming down. Redshift affects only between 2700-3500K.


Main Menu	Menu level 2	Menu level 3	Menu level 4	Description
Settings	Factory / User Reset For more and detailed information about the different reset options please refer to chapter "5.4.6.1 Reset functions"	Factory Reset	Are you sure to reset? / Confirm by pressing ENTER, cancel with ESC	Restores all factory defaults , but not User defaults and no User Colors
		User Reset	Are you sure to reset? / Confirm by pressing ENTER, cancel with ESC	Restores all User Reset according to the User Preset List. User Colors will not set back. Timer Function and DMX adress restore to Factory default. Once User Reset is activated a fixture self test will start. Self Test is not available while activating User Rest by DMX Settings.
		User Reset List	DMX Mode 3CH CCT, 3CH RGB, 6CH RGB, 8CH RGB, 11CH RGB , 15CH RGB, 4CH DIRECT, 8CH DIRECT, 9CH DIRECT, 12CH DIRECT, 17CH DIRECT, 10CH HSI	Select your User Reset defaults
			CRMX <on/off>	
			CRMX Operating Mode. <receive/transmit>	
			CRMX Receive Reset <no/yes>	
			BLE <on/off>	
			BLE Link <no/yes>	
			BLE Password <0000 00>	
			CRMX Pass to DMX Out <no/yes>	
			Startup Mode <DMX/ Auto/Editor/Color Macro, Quick Color, Tunable White, User Color>	
			DMX Fail <Hold/Black-out/Emergency>	
			Dimmer Curve <Linear, Exponential, Logarithmic, S-Curve>	
			Dimmer Response <LED, Halogen >	
			Color Calibration Normal CRI / High CRI	
			RAW Balance <RAW / User Calibration>	
			LED Frequency <800Hz, 1200Hz , 2000Hz, 3600Hz, 12000Hz, 25000Hz>	
			Fan <Auto 1 , Auto 2, Silent, Studio, Fan Off, Max Power>	
			Redshift <on/off>	

Dimmer Curves


Linear




Exponential



Logarithmic



S-Curve



5.4.4.1 Reset Functions

	DMX Address and Mode	Ethernet settings (if available)	Stand Alone User Colors	User Reset List	Other Settings	LED + Fan Test	Note
DMX: Factory Reset	keep	keep	reset to default	keep	reset to default	no	starts only if shutter channel has DMX value "250"
DMX: User Reset	keep	keep	keep	keep	set corresponding to user reset list settings	no	starts only if shutter channel has DMX value "250"
RDM: Factory Reset	keep	keep	reset to default	keep	reset to default	no	
RDM: User Reset	keep	keep	keep	keep	set corresponding to user reset list settings	no	
RDM: Factory Defaults	reset to default	reset to default	reset to default	keep	reset to default	no	
Menu: Factory Reset (change DMX Address/ Mode)	reset to default	reset to default	reset to default	keep	reset to default	yes	
Menu: Factory Reset (keep DMX Address/ Mode)	keep	keep	reset to default	keep	reset to default	yes	
Menu: User Reset (change DMX Address/ Mode)	reset Address to default, DMX Mode corresponding to user reset list settings	reset to default	keep	keep	set corresponding to user reset list settings	yes	
Menu: User Reset (keep DMX Address/Mode)	keep	keep	keep	keep	set corresponding to user reset list settings	yes	
After USB Firmware Update: Reset (change DMX Address/Mode)	reset to default	reset to default	reset to default	keep	reset to default	no	
After USB Firmware Update: Reset (keep DMX Address/Mode)	keep	keep	keep	keep	keep	no	

5.4.5 System Info

Level 1

Menu
DMX Mode Stand Alone Settings ➡ System Info

Main Menu	Menu level 2	Menu level 3	Menu level 4
System Info	Firmware Version	vx.xx	Display installed firmware version
	Serial Number	138xxxxxxxx	
	RDM UID	0X6a6axxxxxxxx	Display unique RDM ID for identification
	Temperatures	Celsius LED : XXX°C or Fahrenheit LED : XXX °F	Display fixture temperature by celsius and fahrenheit
	Power on Time	Total: xxxxxhours	Display fixture total power on time
	LED on Time	Total: xxxxxhours	Display LED total power on time
	Errors	Errors information	Display error codes

6. ACCESSORIES

6.1 Accessories


Available filters of ROXX NEOi mini with order numbers:



Full Glare Shield
Art.: 14907902



Half Glare Shield
Art.: 14907802




ROXX Guard
Art.: 14908002



ROXX Grid
Art.: 14908102



Wall Mount Floor
Art.: 14906702



Wall Mount 90°
Art.: 14906802



Omega Bracket STi
Art.: 90900025



CRM Modul
Art.: 90900008

6.2 Accessories - Filters

Available filters of ROXX NEOi mini with order numbers:



Internal Filterframe
10° Very Narrow
Art.: 14907024



Internal Filterframe
15° Narrow
Art.: 14907124



Internal Filterframe
40° Medium
Art.: 14907224



Internal Filterframe
80° Wide
Art.: 14907324




Internal Filterframe
60°x10° Horizontal
Art.: 14907424



Internal Filterframe
10°x60° Vertical
Art.: 14907524


7. TECHNICAL DATA / DIAGRAMS

7.1 Technical drawings and measurements

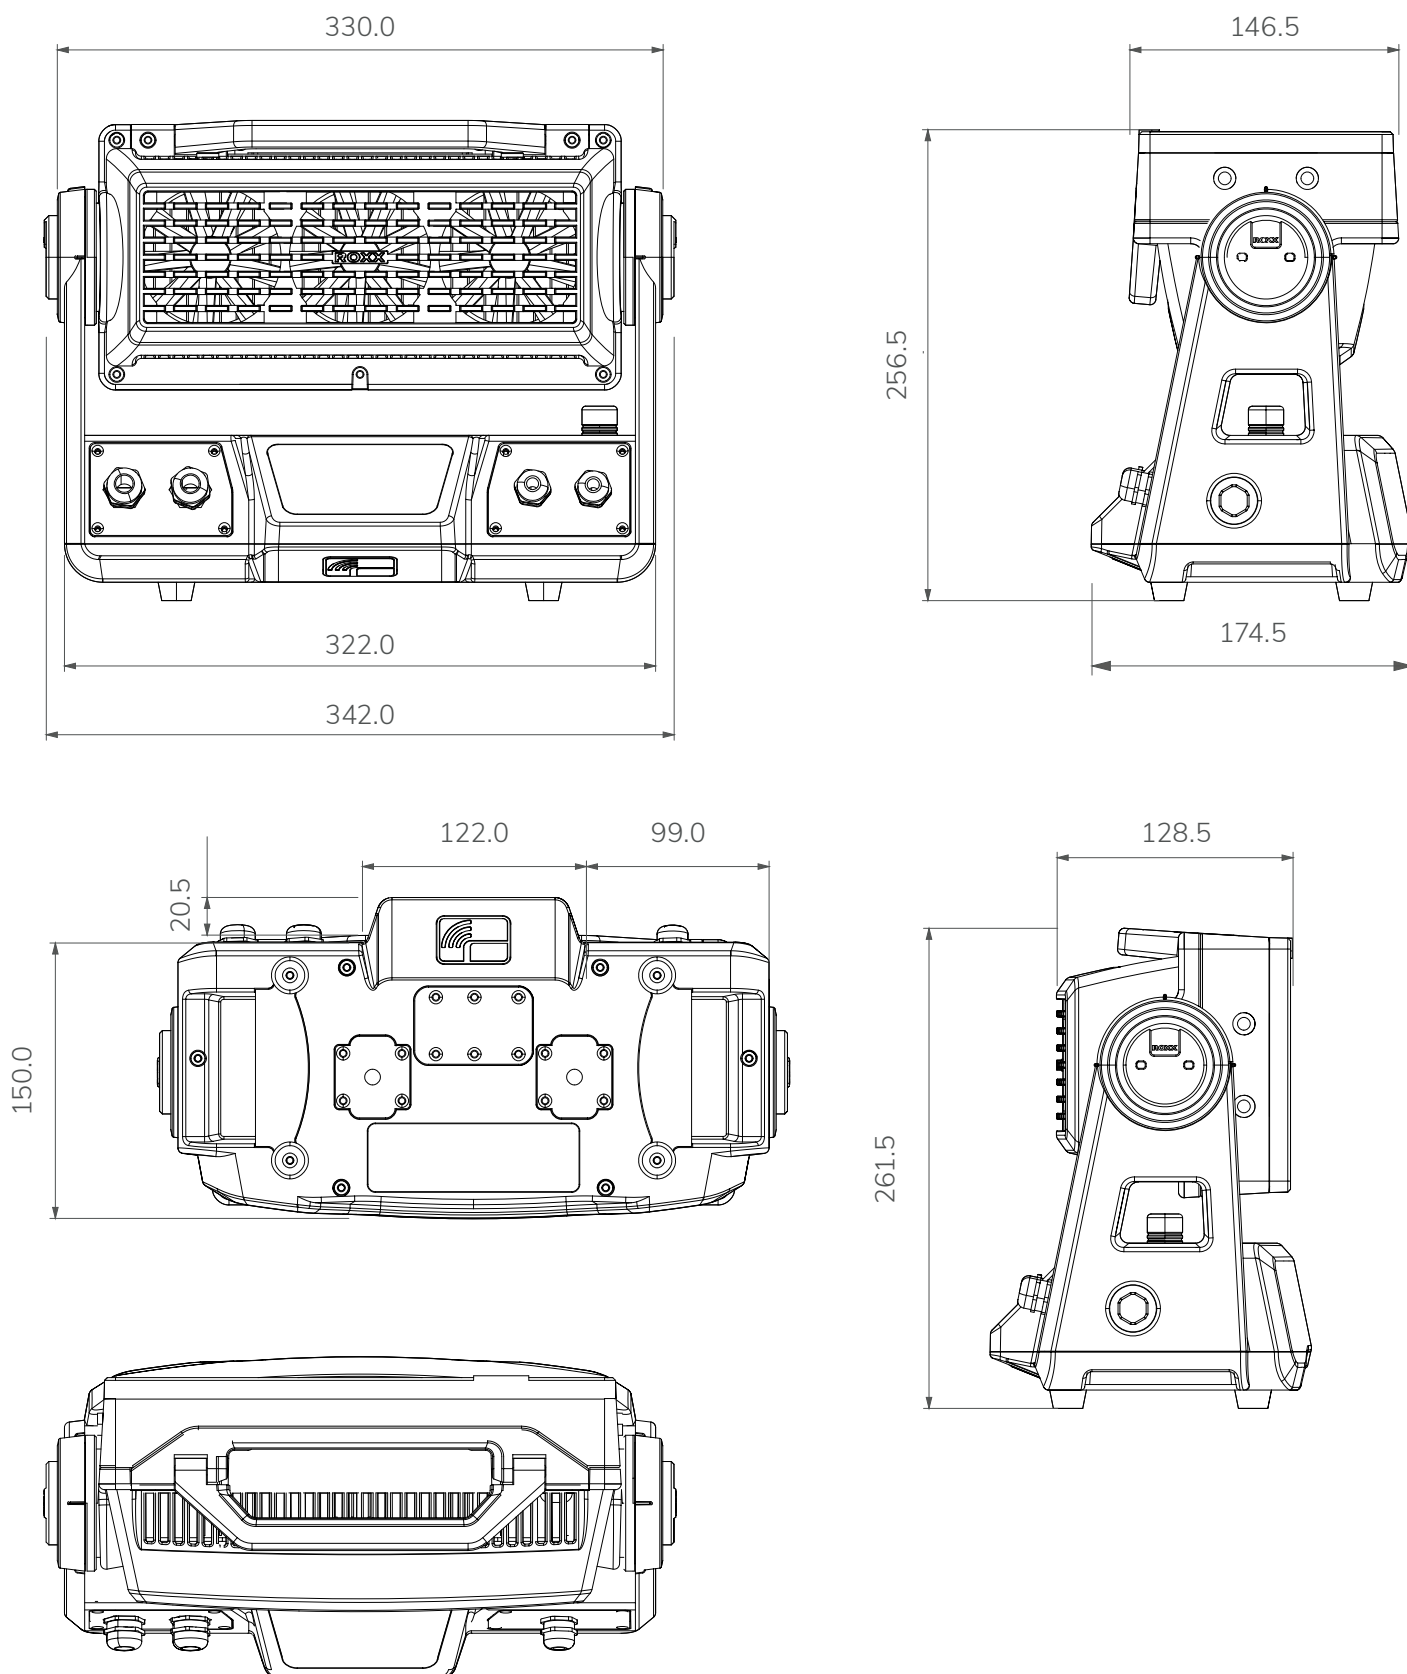

7.2 IP Rating

ROXX products conform to officially classified IP standard levels. NEOi mini is rated to IP66 when using the covers for the housing parts. IP stands for Ingress Protection and IP65, according to classified standard, means shielded against dust and high-pressure jets of water from any side.

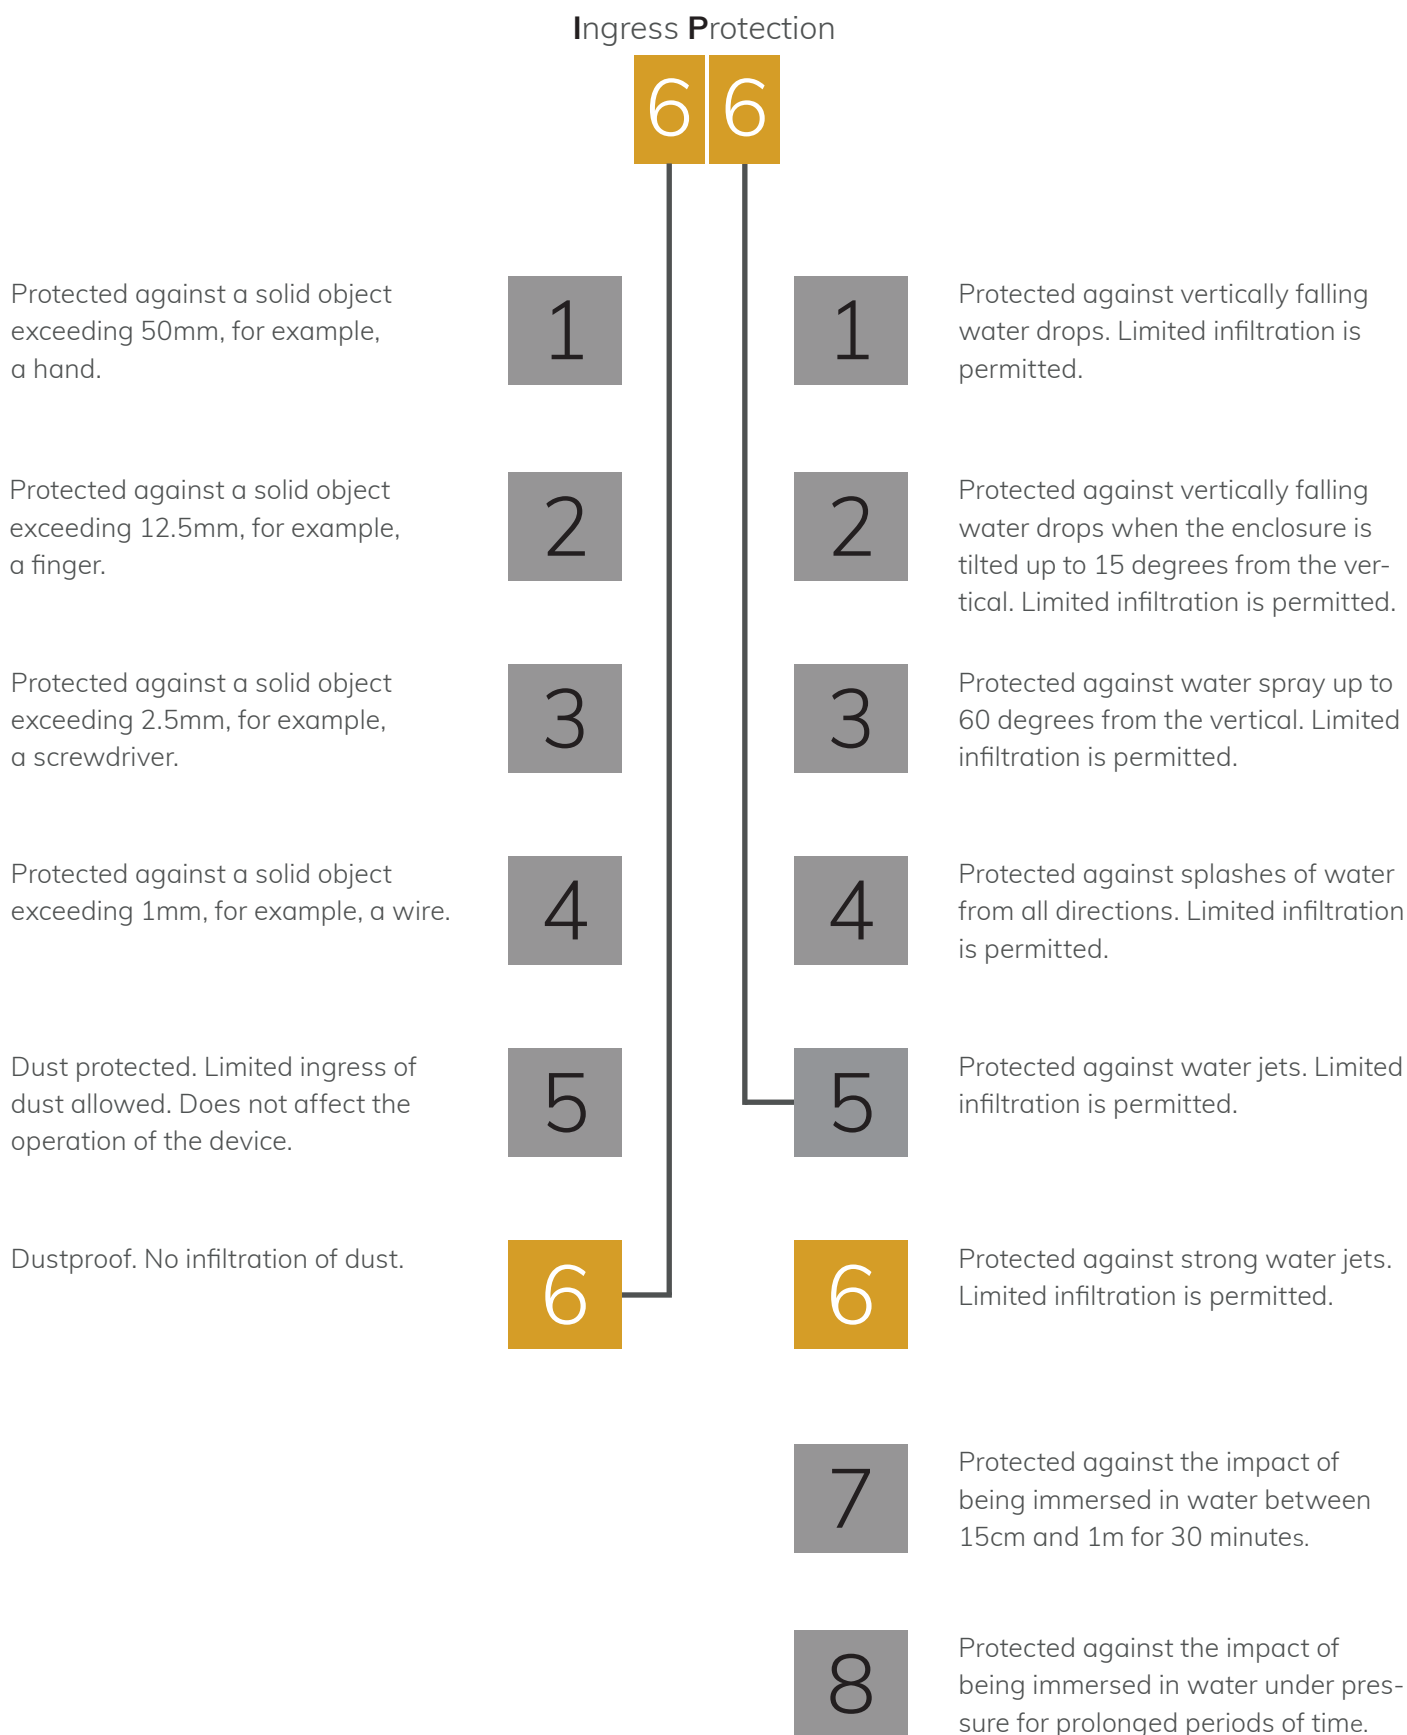

7.3 Technical Data

Photometrics	
LED expected lifetime	50.000 hours
Lightsource	10x 60W RGBL
Type of optical system	TIR lens
LED PWM Frequency	selectable 800Hz, 1.200Hz, 2.000Hz, 3.600Hz, 12kHz, 25kHz
Beam angles @ Full (50%)	8° (native)
Maximum Field angles @ Full (10%)	16° (native)
Color temperature range	2000-10.000K
CRI/Ra @ 5600K	85
TLCI @ 5600K	74
Luminous flux @ Full (RAW)	20.681lm (677,6 W)
Luminous flux @ 5600K (Normal CRI)	20.210lm (533,1W)
Luminous flux @ 5600K (High CRI)	14.699lm (299,8 W)
illuminance Lux @ 5m / 16,4ft (@ Full)	22.739lx
illuminance Lux @ 5m / 16,4ft (@ 5600K Normal CRI)	22.297lx
illuminance Lux @ 5m / 16,4ft (@ 5600K High CRI)	15.863lx
Efficacy @ Full (max)	49 lm/W
Dimensions & Weight	
IP class	IP66
IK class	IK09
Body material	Aluminum, Nylon
Lens material	Tempered glass front
Net dimensions (w x h x d)	367,5 x 261,5 x 174,5 mm
Net dimensions inches	14,47 x 10,30 x 6,87 inches
Net weight (incl. Yoke)	7,7kg / 16,97 lbs
Tilt	220°
Tilt Locking System	Locking system including angle indicator
Thermal Characteristics	
Cooling	Active, Forced Air, Temperature-regulated
Humidity (max.)	95%
Temperature range, Operating	-40°C to 45°C
Temperature range, Start-Up	-20° to 45°C
Temperature range, Storage	-40°C to 80°C
Thermal Protection	Automatic overtemperature protection
Electrical Data	
AC Power, max	90 – 285V 50/60Hz
AC Power, nominal	100 – 240V 50/60Hz
Electrical protection	Overload protection with automatic recover
Max. power consumption	706W @ 100V / 688W @ 230V
Standby Power	13,4W
Power Thru max. @ 100V	5A (ETL) / 8A
Power Thru max. @ 230V	9A (ETL) / 12A

7.3 Technical Data

Electrical Data	
Power Linking	1 unit @ 100V / 3 units @ 230V
Power Factor	PF0.996 @ 100V / PF0.979 @ 230V
Power Supply Unit	Inbuilt auto-ranging electronic switch-mode
Operator & Controller	
DMX channels	3CH CCT, 3CH RGB, 6CH RGB, 8CH RGB, 11CH RGB, 15CH RGB, 4CH DIRECT, 8CH DIRECT, 9CH DIRECT, 12CH DIRECT, 17CH DIRECT, 10CH HSI
DMX modes	16
Protocol	USITT DMX512A
	RDM ANSI E1.20
	CRMX, W-DMX™ G2, W-DMX™ G3, W-DMX™ G4, W-DMX™ G4S (optional)
	Bluetooth Low Energy (optional)
Setting and addressing	Near Field Control (NFC)
	RDM ANSI E1.20
Standalone mode	Auto Program, Color Macro, Quick Color, Tunable White, User Color
Wireless DMX	optional Lumen Radio transmit & receive function (CRMX)
indicator	none
controls	none
Strobe	0-30Hz
DMX I/O	PG9 incl. 3m meter cable for DMX In and DMX Thru
Power In	PG11 incl. 3m
Power Out	PG11 incl. sealing cap
Included / Optional	
Included items	none
Optional Accessories	Multiple in-built filters (circular / elliptical), Half Anti-Glare Shield, Full Anti-Glare Shield, Grid, Rock Guard, Floor Mounting Plate, Wall Mounting Plater, Omega Bracket STi
Color options	Black - RAL9004 C5H coated
	Custom color – any RAL C5H coated (on request)
Installation	
Mounting point on fixture bottom side	1x M10 Omega Bracket
Orientation	Any
Rigging possibilities	hanging direct
Minimum distance from flammable materials	0,3 meters (11,8 inch)

7.4 DMX-Charts / Color Macro Charts / CCT Chart

3CH CCT	8CH RGB	4CH DIRECT	12CH DIRECT
3CH RGB	11CH RGB / Default Mode	8CH DIRECT	17CH DIRECT
6CH RGB	15CH RGB	9CH DIRECT	10CH HSI

Channel	3CH CCT	3CH RGB	6CH RGB	8CH RGB	11CH RGB (default)	15CH RGB
1	Dimmer	Red	Red	Dimmer	Dimmer	Dimmer
2	CTC	Green	Red Fine	Shutter	Shutter	Dimmer Fine
3	Tint	Blue	Green	Red	Duration	Shutter
4			Green Fine	Green	Red	Duration
5			Blue	Blue	Green	Red
6			Blue Fine	CTC	Blue	Red Fine
7				Tint	CTC	Green
8				Device Settings	Tint	Green Fine
9					Color Macro	Blue
10					Color Macro Crossfade	Blue Fine
11					Device Settings	CTC
12						Tint
13						Color Macro
14						Color Macro Crossfade
15						Device Settings

Channel	4CH DIRECT	8CH DIRECT	9CH DIRECT	12CH DIRECT	17CH DIRECT	10CH HSI
1	Red	Red	Dimmer	Dimmer	Dimmer	Dimmer
2	Green	Red Fine	Shutter	Shutter	Dimmer Fine	Dimmer Fine
3	Blue	Green	Red	Duration	Shutter	Shutter
4	Lime	Green Fine	Green	Red	Duration	Hue
5		Blue	Blue	Green	Red	Saturation
6		Blue Fine	Lime	Blue	Red Fine	CTC
7		Lime	CTC	Lime	Green	Tint
8		Lime Fine	Tint	CTC	Green Fine	Color Macro
9			Device Settings	Tint	Blue	Color Macro Crossfade
10				Color Macro	Blue Fine	Device Settings
11				Color Macro Crossfade	Lime	
12				Device Settings	Lime Fine	
13					CTC	
14					Tint	
15					Color Macro	
16					Color Macro Crossfade	
17					Device Settings	

3CH CCT	8CH RGB	4CH DIRECT	12CH DIRECT
3CH RGB	11CH RGB / Default Mode	8CH DIRECT	17CH DIRECT
6CH RGB	15CH RGB	9CH DIRECT	10CH HSI

3 CH CCT MODE (Color Calibrated)				
Ch.	Function	Value	Setting	Default
1	Dimmer	000-255	0 - 100%	0
2	CTC	000 - 004	5600K	0
		005-226	2000K-6500K linear in 20-21K steps (please see detailed CTC chart)	
		182-182	5600K	
		226-226	6500K	
		227-255	6621K-10.000K linear in 120-121K steps (please see detailed CTC chart)	
3	Tint (affects CCT)	0	no function	128
		001-127	Magenta -> Neutral	
		128-128	Neutral	
		129-255	Neutral -> Green	
3 CH - RGB MODE (Color Calibrated)				
Ch.	Function	Value	Setting	Default
1	Red	000-255	0 - 100%	0
2	Green	000-255	0 - 100%	0
3	Blue	000-255	0 - 100%	0
6 CH - RGB MODE (Color Calibrated)				
Ch.	Function	Value	Setting	Default
1	Red	000-255	0 - 100%	0
2	Red Fine	000-255	0 - 100%	0
3	Green	000-255	0 - 100%	0
4	Green Fine	000-255	0 - 100%	0
5	Blue	000-255	0 - 100%	0
6	Blue Fine	000-255	0 - 100%	0

8 CH - RGB (Color Calibrated)				
Ch.	Function	Value	Setting	Default
1	Dimmer	000-255	0 - 100%	0
2	Shutter	000 - 019	Shutter close	20
		020 - 024	Shutter open	
		025 - 064	Strobe 1 (fast ⊕ slow)	
		065 - 069	Shutter open	
		070 - 084	Strobe 2: opening pulse (fast ⊕ slow)	
		085 - 089	Shutter open	
		090 - 104	Strobe 3: closing pulse (fast ⊕ slow)	
		105 - 109	Shutter open	
		110 - 124	Strobe 4: random strobe (fast ⊕ slow)	
		125 - 129	Shutter open	
		130 - 144	Strobe 5: random opening pulse (fast ⊕ slow)	
		145 - 149	Shutter open	
		150 - 164	Strobe 6: random closing pulse (fast ⊕ slow)	
		165 - 169	Shutter open	
		170 - 184	Strobe 7: burst pulse (fast ⊕ slow)	
		185 - 189	Shutter open	
		190 - 204	Strobe 8: random burst pulse (fast ⊕ slow)	
		205 - 209	Shutter open	
		210 - 224	Strobe 9: sine wave (fast ⊕ slow)	
		225 - 229	Shutter open	
		230 - 244	Strobe 10: burst (fast ⊕ slow)	
		245 - 255	Shutter open	
3	Red	000-255	0 - 100%	255
4	Green	000-255	0 - 100%	255
5	Blue	000-255	0 - 100%	255
6	CTC (affects RGB)	000 - 004	5600K	according to CTC chart 0
		005-226	2000K-6500K (please see detailed CTC chart)	
		182-182	5600K	
		226-226	6500K	
		227-255	6621K-10.000K (please see detailed CTC chart)	
7	Tint (affects CTC, RGB)	0	no function	128
		001-127	Magenta ⊕ Neutral	
		128-128	Neutral	
		129-255	Neutral ⊕ Green	
8	Device Settings			according to Device Settings RGB mode 0

11 CH RGB Mode (Color Calibrated) - Default mode

Ch.	Function	Value	Setting	Default	
1	Dimmer	000-255	0 - 100%	0	
2	Shutter	000 - 019	Shutter close	20	
		020 - 024	Shutter open		
		025 - 064	Strobe 1 (fast ⊕ slow)		
		065 - 069	Shutter open		
		070 - 084	Strobe 2: opening pulse (fast ⊕ slow)		
		085 - 089	Shutter open		
		090 - 104	Strobe 3: closing pulse (fast ⊕ slow)		
		105 - 109	Shutter open		
		110 - 124	Strobe 4: random strobe (fast ⊕ slow)		
		125 - 129	Shutter open		
		130 - 144	Strobe 5: random opening pulse (fast ⊕ slow)		
		145 - 149	Shutter open		
		150 - 164	Strobe 6:random closing pulse (fast ⊕ slow)		
		165 - 169	Shutter open		
		170 - 184	Strobe 7: burst pulse (fast ⊕ slow)		
		185 - 189	Shutter open		
		190 - 204	Strobe 8: random burst pulse (fast ⊕ slow)		
		205 - 209	Shutter open		
		210 - 224	Strobe 9:sine wave (fast ⊕ slow)		
		225 - 229	Shutter open		
		230 - 244	Strobe 10: burst (fast ⊕ slow)		
		245 - 255	Shutter open		
3	Duration (only affects to channel 2 - Strobe 1 025-064)	000-255	0 - 100%	0	
4	Red	000-255	0 - 100%	255	
5	Green	000-255	0 - 100%	255	
6	Blue	000-255	0 - 100%	255	
7	CTC (affects RGB)	000 - 004	5600K	according to CTC chart	0
		005-226	2000K-6500K linear in 20-21K steps (please see detailed CTC chart)		
		182-182	5600K		
		226-226	6500K		
		227-255	6621K-10.000K linear in 120-121K steps (please see detailed CTC chart)		
8	Tint (affects CTC and RGB)	0	no function		128
		001-127	Magenta -> Neutral		
		128-128	Neutral		
		129-255	Neutral -> Green		

9	Color Macro (override RGB/CTC)		please use color macros from ROXX color macro chart		0
10	Color Macro Crossfade (Transition Time between Color Macros)	000 - 005	no function		0
		006-105	0,1s - 10s (0,1s steps)		
		106-214	11s - 119s (1s steps)		
		215-244	2m - 4m50s (10s steps)		
		245-255	5m - 15m (1m steps)		
11	Device Settings			according to Device Settings RGB mode	0
15 CH RGB Mode (Color Calibrated)					
Ch.	Function	Value	Setting		Default
1	Dimmer	000-255	0 - 100%		0
2	Dimmer Fine	000-255	0 - 100%		0
3	Shutter	000 - 019	Shutter close		20
		020 - 024	Shutter open		
		025 - 064	Strobe 1 (fast ⊕ slow)		
		065 - 069	Shutter open		
		070 - 084	Strobe 2: opening pulse (fast ⊕ slow)		
		085 - 089	Shutter open		
		090 - 104	Strobe 3: closing pulse (fast ⊕ slow)		
		105 - 109	Shutter open		
		110 - 124	Strobe 4: random strobe (fast ⊕ slow)		
		125 - 129	Shutter open		
		130 - 144	Strobe 5: random opening pulse (fast ⊕ slow)		
		145 - 149	Shutter open		
		150 - 164	Strobe 6:random closing pulse (fast ⊕ slow)		
		165 - 169	Shutter open		
		170 - 184	Strobe 7: burst pulse (fast ⊕ slow)		
		185 - 189	Shutter open		
		190 - 204	Strobe 8: random burst pulse (fast ⊕ slow)		
		205 - 209	Shutter open		
		210 - 224	Strobe 9:sine wave (fast ⊕ slow)		
		225 - 229	Shutter open		
		230 - 244	Strobe 10: burst (fast ⊕ slow)		
		245 - 255	Shutter open		
4	Duration	000-255	0 - 100%	(only affects to channel 3 - Strobe 1 025-064)	0
5	Red	000-255	0 - 100%		255
6	Red Fine	000-255	0 - 100%		255
7	Green	000-255	0 - 100%		255
8	Green Fine	000-255	0 - 100%		255
9	Blue	000-255	0 - 100%		255
10	Blue Fine	000-255	0 - 100%		255

15 CH RGB Mode (Color Calibrated)

11	CTC (affects RGB)	000 - 004	5600K	according to CTC chart.	0
		005-226	2000K-6500K linear in 20-21K steps (please see detailed CTC chart)		
		182-182	5600K		
		226-226	6500K		
		227-255	6621K-10.000K linear in 120-121K steps (please see detailed CTC chart)		
12	Tint (affects CTC and RGB)	0	no function		128
		001-127	Magenta -> Neutral		
		128-128	Neutral		
		129-255	Neutral -> Green		
13	Color Macro (override RGB /CTC)		According to Color Macro Chart		0
14	Color Macro Crossfade (Transition Time between Color Macros)	000 - 005	no function		0
		006-105	0,1s - 10s (0,1s steps)		
		106-214	11s - 119s (1s steps)		
		215-244	2m - 4m50s (10s steps)		
		245-255	5m - 15m (1m steps)		
15	Device Settings			according to Device Settings RGB mode	0

4 CH - DIRECT MODE (RAW Balance)

Ch.	Function	Value	Setting	Default
1	Red	000-255	0 - 100%	0
2	Green	000-255	0 - 100%	0
3	Blue	000-255	0 - 100%	0
4	Lime	000-255	0 - 100%	0

8 CH - DIRECT MODE (RAW Balance)

Ch.	Function	Value	Setting	Default
1	Red	000-255	0 - 100%	0
2	Red Fine	000-255	0 - 100%	0
3	Green	000-255	0 - 100%	0
4	Green Fine	000-255	0 - 100%	0
5	Blue	000-255	0 - 100%	0
6	Blue Fine	000-255	0 - 100%	0
7	Lime	000-255	0 - 100%	0
8	Lime Fine	000-255	0 - 100%	0

9 CH - DIRECT MODE (RAW Balance)

Ch.	Function	Value	Setting		Default	
1	Dimmer	000-255	0 - 100%		0	
2	Shutter	000 - 019	Shutter close		20	
		020 - 024	Shutter open			
		025 - 064	Strobe 1 (fast ⊕ slow)			
		065 - 069	Shutter open			
		070 - 084	Strobe 2: opening pulse (fast ⊕ slow)			
		085 - 089	Shutter open			
		090 - 104	Strobe 3: closing pulse (fast ⊕ slow)			
		105 - 109	Shutter open			
		110 - 124	Strobe 4: random strobe (fast ⊕ slow)			
		125 - 129	Shutter open			
		130 - 144	Strobe 5: random opening pulse (fast ⊕ slow)			
		145 - 149	Shutter open			
		150 - 164	Strobe 6:random closing pulse (fast ⊕ slow)			
		165 - 169	Shutter open			
		170 - 184	Strobe 7: burst pulse (fast ⊕ slow)			
		185 - 189	Shutter open			
		190 - 204	Strobe 8: random burst pulse (fast ⊕ slow)			
		205 - 209	Shutter open			
		210 - 224	Strobe 9:sine wave (fast ⊕ slow)			
		225 - 229	Shutter open			
		230 - 244	Strobe 10: burst (fast ⊕ slow)			
		245 - 255	Shutter open			
3	Red	000-255	0 - 100%		255	
4	Green	000-255	0 - 100%		255	
5	Blue	000-255	0 - 100%		255	
6	Lime	000-255	0 - 100%		255	
7	CTC (affects RGBL)	000 - 004	RAW		according to CTC chart.	0
		005-226	2000K-6500K linear in 20-21K steps (please see detailed CTC chart)			
		182-182	5600K			
		226-226	6500K			
		227-255	6621K-10.000K linear in 120-121K steps (please see detailed CTC chart)			
8	Tint (affects CTC and RGBL)	0	no function		128	
		001-127	Magenta -> Neutral			
		128-128	Neutral			
		129-255	Neutral -> Green			
9	Device Settings			according to Device Settings DIRECT mode	0	

12 CH - DIRECT MODE (RAW Balance)

Ch.	Function	Value	Setting	Default
1	Dimmer	000-255	0 - 100%	0
2	Shutter	000 - 019	Shutter close	20
		020 - 024	Shutter open	
		025 - 064	Strobe 1 (fast ⊕ slow)	
		065 - 069	Shutter open	
		070 - 084	Strobe 2: opening pulse (fast ⊕ slow)	
		085 - 089	Shutter open	
		090 - 104	Strobe 3: closing pulse (fast ⊕ slow)	
		105 - 109	Shutter open	
		110 - 124	Strobe 4: random strobe (fast ⊕ slow)	
		125 - 129	Shutter open	
		130 - 144	Strobe 5: random opening pulse (fast ⊕ slow)	
		145 - 149	Shutter open	
		150 - 164	Strobe 6: random closing pulse (fast ⊕ slow)	
		165 - 169	Shutter open	
		170 - 184	Strobe 7: burst pulse (fast ⊕ slow)	
		185 - 189	Shutter open	
		190 - 204	Strobe 8: random burst pulse (fast ⊕ slow)	
		205 - 209	Shutter open	
		210 - 224	Strobe 9: sine wave (fast ⊕ slow)	
		225 - 229	Shutter open	
		230 - 244	Strobe 10: burst (fast ⊕ slow)	
		245 - 255	Shutter open	
3	Duration	000-255	0 - 100% (only affects to channel 3 - Strobe 1 025-064)	0
4	Red	000-255	0 - 100%	255
5	Green	000-255	0 - 100%	255
6	Blue	000-255	0 - 100%	255
7	Lime	000-255	0 - 100%	255
8	CTC (affects RGBL)	000 - 004	RAW	according to CTC chart 0
		005-226	2000K-6500K linear in 20-21K steps (please see detailed CTC chart)	
		182-182	5600K	
		226-226	6500K	
		227-255	6621K-10.000K linear in 120-121K steps (please see detailed CTC chart)	
9	Tint (affects CTC and RGBL)	0	no function	128
		001-127	Magenta -> Neutral	
		128-128	Neutral	
		129-255	Neutral -> Green	
10	Color Macro (over- ride RGBL, CTC)		according to Color Macro Chart	0

12 CH - DIRECT MODE (RAW Balance)

11	Color Macro Crossfade (Transition Time between Color Macros)	000 - 005	no function		0
		006-105	0,1s - 10s (0,1s steps)		
		106-214	11s - 119s (1s steps)		
		215-244	2m - 4m50s (10s steps)		
		245-255	5m - 15m (1m steps)		
12	Device Settings			according to Device Settings DIRECTmode	0

17 CH - DIRECT MODE (RAW Balance)

Ch.	Function	Value	Setting		Default
1	Dimmer	000-255	0 - 100%		0
2	Dimmer Fine	000-255	0 - 100%		0
3	Shutter	000 - 019	Shutter close		20
		020 - 024	Shutter open		
		025 - 064	Strobe 1 (fast ⊕ slow)		
		065 - 069	Shutter open		
		070 - 084	Strobe 2: opening pulse (fast ⊕ slow)		
		085 - 089	Shutter open		
		090 - 104	Strobe 3: closing pulse (fast ⊕ slow)		
		105 - 109	Shutter open		
		110 - 124	Strobe 4: random strobe (fast ⊕ slow)		
		125 - 129	Shutter open		
		130 - 144	Strobe 5: random opening pulse (fast ⊕ slow)		
		145 - 149	Shutter open		
		150 - 164	Strobe 6:random closing pulse (fast ⊕ slow)		
		165 - 169	Shutter open		
		170 - 184	Strobe 7: burst pulse (fast ⊕ slow)		
		185 - 189	Shutter open		
		190 - 204	Strobe 8: random burst pulse (fast ⊕ slow)		
		205 - 209	Shutter open		
		210 - 224	Strobe 9:sine wave (fast ⊕ slow)		
		225 - 229	Shutter open		
		230 - 244	Strobe 10: burst (fast ⊕ slow)		
		245 - 255	Shutter open		
4	Duration	000-255	0 - 100%	(only affects to channel 3 - Strobe 1 025-064)	0
5	Red	000-255	0 - 100%		255
6	Red Fine	000-255	0 - 100%		255
7	Green	000-255	0 - 100%		255

17 CH - DIRECT MODE (RAW Balance)

8	Green Fine	000-255	0 - 100%		255	
9	Blue	000-255	0 - 100%		255	
10	Blue Fine	000-255	0 - 100%		255	
11	Lime	000-255	0 - 100%		255	
12	Lime Fine	000-255	0 - 100%		255	
13	CTC (affects RGBL)	000 - 004	RAW		according to CTC chart	0
		005-226	2000K-6500K linear in 20-21K steps (please see detailed CTC chart)			
		182-182	5600K			
		226-226	6500K			
		227-255	6621K-10.000K linear in 120-121K steps (please see detailed CTC chart)			
14	Tint (affects CTC and RGBL)	0	no function			128
		001-127	Magenta -> Neutral			
		128-128	Neutral			
		129-255	Neutral -> Green			
15	Color Macro (override RGBL,CTC)		please use color macros from ROXX color macro chart			0
16	Color Macro Crossfade (Transition Time between Color Macros)	000 - 005	no function			0
		006-105	0,1s - 10s (0,1s steps)			
		106-214	11s - 119s (1s steps)			
		215-244	2m - 4m50s (10s steps)			
		245-255	5m - 15m (1m steps)			
17	Device Settings			according to Device Settings DIRECT mode		0

10CH - HSI Mode (Color Calibrated)

Ch.	Function	Value	Setting	Default
1	Dimmer	000-255	0 - 100%	0
2	Dimmer Fine	000-255	0 - 100%	0
3	Shutter	000 - 019	Shutter close	20
		020 - 024	Shutter open	
		025 - 064	Strobe 1 (fast ⊕ slow)	
		065 - 069	Shutter open	
		070 - 084	Strobe 2: opening pulse (fast ⊕ slow)	
		085 - 089	Shutter open	
		090 - 104	Strobe 3: closing pulse (fast ⊕ slow)	
		105 - 109	Shutter open	

10CH - HSI Mode (Color Calibrated)

3	Shutter	110 - 124	Strobe 4: random strobe (fast ⊕ slow)		20
		125 - 129	Shutter open		
		130 - 144	Strobe 5: random opening pulse (fast ⊕ slow)		
		145 - 149	Shutter open		
		150 - 164	Strobe 6:random closing pulse (fast ⊕ slow)		
		165 - 169	Shutter open		
		170 - 184	Strobe 7: burst pulse (fast ⊕ slow)		
		185 - 189	Shutter open		
		190 - 204	Strobe 8: random burst pulse (fast ⊕ slow)		
		205 - 209	Shutter open		
		210 - 224	Strobe 9:sine wave (fast ⊕ slow)		
		225 - 229	Shutter open		
		230 - 244	Strobe 10: burst (fast ⊕ slow)		
		245 - 255	Shutter open		
4	Hue	000-255	0° (RED) Thru 360°		0
5	Saturation	000-255	0 - 100%		0
6	CTC (affects HUE and Saturation) --> CTC no effect if Sa- turation to 100%	000 - 004	5600K	according to CTC chart	0
		005-226	2000K-6500K linear in 20-21K steps (please see detailed CTC chart)		
		182-182	5600K		
		226-226	6500K		
		227-255	6621K-10.000K linear in 120-121K steps (please see detailed CTC chart)		
7	Tint (affects CTC, HUE and Satura- tion). --> Tint no effect if Saturation to 100%	0	no function		128
		001-127	Magenta -> Neutral		
		128-128	Neutral		
		129-255	Neutral -> Green		
8	Color Macro (override HUE/ SATURATION/CTC)		please use color macros from ROXX color macro chart		0
9	Color Macro Crossfade (Transition Time between Color Macros)	000 - 005	no function		0
		006-105	0,1s - 10s (0,1s steps)		
		106-214	11s - 119s (1s steps)		
		215-244	2m - 4m50s (10s steps)		
		245-255	5m - 15m (1m steps)		
10	Device Settings			according to Device Settings RGB mode	0

Device Setting RGB Modes

Ch.	Settings	DMX Value	Function	remark
Device Settings (please see remark *1)		000-005	No function	
		6	Display Backlight On (hold 3s)	
		7	Display Backlight Off (hold 3s)	
		8	Display Lock On (hold 3s)	
		9	Display Lock Off (hold 3s)	
		010-014	reserved / no function	
		15	DMX Fail - Blackout (hold 3s)	
		16	DMX Fail - Hold (hold 3s)	
		17	DMX Fail - Emergency Light (hold 3s)	
		018-022	reserved / no function	
		23	Linear Dimmer Curve (hold 3s)	
		24	Exponential Dimmer Curve (hold 3s)	
		25	Logarithmic Dimmer Curve (hold 3s)	
		26	S-Curve Dimmer Curve (hold 3s)	
		027-031	reserved / no function	
		32	Dimmer Response LED / fast (hold 3s)	
		33 reserved	reserved / no function	
		34	Dimmer Respononse Halogen / slow (hold 3s)	
		035-039	reserved / no function	
		40	Calibration - High CRI (Colors & CCT / hold 3s)	
		41	Calibration - Normal CRI (Colors & CCT / hold 3s)	
		042-046	reserved / no function	
		47	LED Frequency 800Hz (hold 3s)	
		48	LED Frequency 1200Hz (hold 3s)	
		49	LED Frequency 2000Hz (hold 3s)	
		50	LED Frequency 3600Hz (hold 3s)	
		51	LED Frequency 12kHz (hold 3s)	
		52	LED Frequency 25kHz (hold 3s)	
		053-057	reserved / no function	
		58	Fan Auto 1 (hold 3s)	
		59	Fan Auto 2 (hold 3s)	
		60	Fan Silent (hold 3s)	

Device Setting RGB Modes

Ch.	Settings	DMX Value	Function	remark
	Device Settings (please see remark *1)	61	Fan Studio (hold 3s)	
		62	Fan Off (hold 3s)	
		63	Fan High Power (hold 3s)	
		064-068	reserved / no function	
		69	Redshift On (hold 3s)	Redshift (affects only between 2700-3500K)
		70	Redshift Off (hold 3s)	
		071-244	reserved / no function	
		245	Snapshot (hold 3s)	
		246-248	reserved / no function	
		249	User Reset (hold 3s)	No Change of DMX Address and Mode! / Reset activates only if Shutter is set to DMX 250
		250	Factory Reset (hold 3s)	No Change of DMX Address and Mode! / Reset activates only if Shutter is set to DMX 250
		251 - 255 reserved	No Function	

remark*1: After adjustments please set the value back to 000 to avoid any disturbance by endless function call.

Device Setting DIRECT Modes

Ch.	Settings	DMX Value	Function	remark
Device Settings (please see remark *1)		000-005	No function	
		6	Display Backlight On (hold 3s)	
		7	Display Backlight Off (hold 3s)	
		8	Display Lock On (hold 3s)	
		9	Display Lock Off (hold 3s)	
		010-014	reserved / no function	
		15	DMX Fail - Blackout (hold 3s)	
		16	DMX Fail - Hold (hold 3s)	
		17	DMX Fail - Emergency Light (hold 3s)	
		018-022	reserved / no function	
		23	Linear Dimmer Curve (hold 3s)	
		24	Exponential Dimmer Curve (hold 3s)	
		25	Logarithmic Dimmer Curve (hold 3s)	
		26	S-Curve Dimmer Curve (hold 3s)	
		027-031	reserved / no function	
		32	Dimmer Response LED / fast (hold 3s)	
		33 reserved	reserved / no function	
		34	Dimmer Respononse Halogen / slow (hold 3s)	
		035-039	reserved / no function	
		40	RAW Mode (hold 3s)	
		41	User Calibration (hold 3s)	
		042-046	reserved / no function	
		47	LED Frequency 800Hz (hold 3s)	
		48	LED Frequency 1200Hz (hold 3s)	
		49	LED Frequency 2000Hz (hold 3s)	
		50	LED Frequency 3600Hz (hold 3s)	
		51	LED Frequency 12kHz (hold 3s)	
		52	LED Frequency 25kHz (hold 3s)	
		053-057	reserved / no function	
		58	Fan Auto 1 (hold 3s)	
		59	Fan Auto 2 (hold 3s)	
		60	Fan Silent (hold 3s)	

Device Setting DIRECT Modes

Ch.	Settings	DMX Value	Function	remark
	Device Settings (please see remark *1)	61	Fan Studio (hold 3s)	
		62	Fan Off (hold 3s)	
		63	Fan High Power (hold 3s)	
		064-068	reserved / no function	
		69	Redshift On (hold 3s)	Redshift (affects only between 2700-3500K)
		70	Redshift Off (hold 3s)	
		071-244	reserved / no function	
		245	Snapshot (hold 3s)	
		246-248	reserved / no function	
		249	User Reset (hold 3s)	No Change of DMX Address and Mode! / Reset activates only if Shutter is set to DMX 250
		250	Factory Reset (hold 3s)	No Change of DMX Address and Mode! / Reset activates only if Shutter is set to DMX 250
		251 - 255 reserved	No Function	

remark*1: After adjustments please set the value back to 000 to avoid any disturbance by endless function call.

Color Macro Chart

Gels - Color Macros for DMX		
DMX value	Gel Name	Color Number
000-005	no function	
006-008	Red	100% Red LED
009-011	Fire	LEE 019
012-014	Medium Red	LEE 027
015-017	Primary Red	LEE 106
018-020	Med Amber	LEE 020
021-023	Dark Amber	LEE 022
024-026	Deep Amber	LEE 104
027-029	Orange	LEE 105
030-032	Deep Golden Amber	LEE 135
033-035	Yellow	LEE 101
036-038	Green	100% Green LED
039-041	Lime Green	LEE 088
042-044	Moss Green	LEE 089
045-047	LEE Green	LEE 121
048-050	Primary Green	LEE 139
051-053	Jas Green	LEE 738
054-056	Jade	LEE 323
057-059	Blue	100% Blue LED
060-062	Sky Blue	LEE 068
063-065	Tokyo Blue	LEE 071
066-068	Light Blue	LEE 118
069-071	Marine Blue	LEE 131
072-074	Med Blue	LEE 132
075-077	Congo Blue	LEE 181
078-080	Mikkel Blue	LEE 716
081-083	Rose Pink	LEE 002
084-086	Med Pink	LEE 036
087-089	Light Lavender	LEE 052
090-092	Lavender	LEE 058
093-095	Magenta	LEE 113
096-098	Mauve	LEE 126
099-101	Smokey Pink	LEE 127


Gels - Color Macros for DMX		
DMX value	Gel Name	Color Number
102-104	Special Med Lavender	LEE 343
105-107	Ultimate Violet	LEE 707
108-110	Magical Magenta	LEE 795
111-113	Chrysalis Pink	LEE 798
114-116	Specia KH Lavender	LEE 799
117-119	Bulb White	2700K / High CRI
120-122	Halogen White	3200K / High CRI
123-125	Neutral White	4200K / High CRI
126-128	Daylight White	5600K / High CRI
129-131	Cold White I	6000K / High CRI
132-134	Cold White II	6300K / High CRI
135-137	White (only if available)	100% White LED
138-140	Amber (only if available)	100% Amber LED
141-143	Lime (only if available)	100% Lime LED
144-146	Cyan (only if available)	100% Cyan LED
147-149	User Color 1	
150-152	User Color 2	
153-155	User Color 3	
156-158	User Color 4	
159-161	User Color 5	
162-164	Color Jumping stop	
165-209	Color Jumping speed slow @ fast	color 1-37
210-255	Color fading speed slow @ fast	color 1-37

Color Macro Chart

Gels - Color Macros for Standalone Mode		
Position	Gel Name	Color Number
1	Red	100% Red LED
2	Fire	LEE 019
3	Medium Red	LEE 027
4	Primary Red	LEE 106
5	Med Amber	LEE 020
6	Dark Amber	LEE 022
7	Deep Amber	LEE 104
8	Orange	LEE 105
9	Deep Golden Amber	LEE 135
10	Yellow	LEE 101
11	Green	100% Green LED
12	Lime Green	LEE 088
13	Moss Green	LEE 089
14	LEE Green	LEE 121
15	Primary Green	LEE 139
16	Jas Green	LEE 738
17	Jade	LEE 323
18	Blue	100% Blue LED
19	Sky Blue	LEE 068
20	Tokyo Blue	LEE 071
21	Light Blue	LEE 118
22	Marine Blue	LEE 131
23	Med Blue	LEE 132
24	Congo Blue	LEE 181
25	Mikkel Blue	LEE 716
26	Rose Pink	LEE 002
27	Med Pink	LEE 036
28	Light Lavender	LEE 052

Gels - Color Macros for Standalone Mode		
Position	Gel Name	Color Number
29	Lavender	LEE 058
30	Magenta	LEE 113
31	Mauve	LEE 126
32	Smokey Pink	LEE 127
33	Special Med Lavender	LEE 343
34	Ultimate Violet	LEE 707
35	Magical Magenta	LEE 795
36	Chrysalis Pink	LEE 798
37	Specia KH Lavender	LEE 799
38	Bulb White	2700K / High CRI
39	Halogen White	3200K / High CRI
40	Neutral White	4200K / High CRI
41	Daylight White	5600K / High CRI
42	Cold White I	6000 / High CRI
43	Cold White II	6300K / High CRI
44	White (only if available)	100% White LED
45	Amber (only if available)	100% Amber LED
46	Lime (only if available)	100% Lime LED
47	Cyan (only if available)	100% Cyan LED

CTC channel
DMX / Color temperature

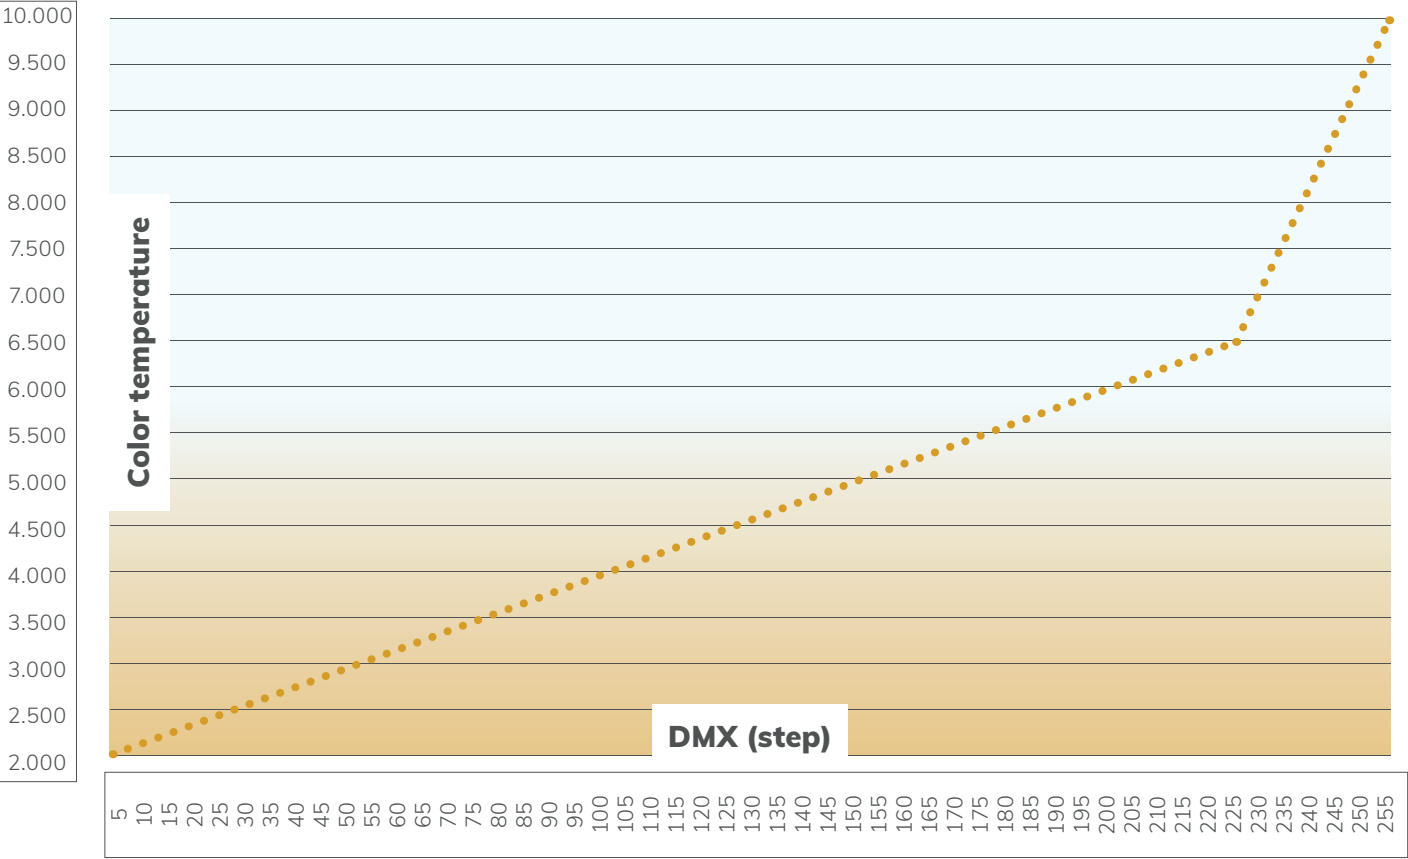

CTC-Chart

DMX (Step)	Color Temp (°K)	DMX (Step)	Color Temp (°K)	DMX (Step)	Color Temp (°K)	DMX (Step)	Color Temp (°K)	DMX (Step)	Color Temp (°K)	DMX (Step)	Color Temp (°K)
0	5600	43	2774	86	3649	129	4525	172	5400	215	6276
1	5600	44	2794	87	3670	130	4545	173	5421	216	6296
2	5600	45	2814	88	3690	131	4566	174	5441	217	6317
3	5600	46	2835	89	3710	132	4586	175	5462	218	6337
4	5600	47	2855	90	3731	133	4606	176	5482	219	6357
5	2000	48	2876	91	3751	134	4627	177	5502	220	6378
6	2020	49	2896	92	3771	135	4647	178	5523	221	6398
7	2041	50	2916	93	3792	136	4667	179	5543	222	6419
8	2061	51	2937	94	3812	137	4688	180	5563	223	6439
9	2081	52	2957	95	3833	138	4708	181	5584	224	6459
10	2102	53	2977	96	3853	139	4729	182	5604	225	6480
11	2122	54	2998	97	3873	140	4749	183	5624	226	6500
12	2143	55	3018	98	3894	141	4769	184	5645	227	6621
13	2163	56	3038	99	3914	142	4790	185	5665	228	6741
14	2183	57	3059	100	3934	143	4810	186	5686	229	6862
15	2204	58	3079	101	3955	144	4830	187	5706	230	6983
16	2224	59	3100	102	3975	145	4851	188	5726	231	7103
17	2244	60	3120	103	3995	146	4871	189	5747	232	7224
18	2265	61	3140	104	4016	147	4891	190	5767	233	7345
19	2285	62	3161	105	4036	148	4912	191	5787	234	7466
20	2305	63	3181	106	4057	149	4932	192	5808	235	7586
21	2326	64	3201	107	4077	150	4952	193	5828	236	7707
22	2346	65	3222	108	4097	151	4973	194	5848	237	7828
23	2367	66	3242	109	4118	152	4993	195	5869	238	7948
24	2387	67	3262	110	4138	153	5014	196	5889	239	8069
25	2407	68	3283	111	4158	154	5034	197	5910	240	8190
26	2428	69	3303	112	4179	155	5054	198	5930	241	8310
27	2448	70	3324	113	4199	156	5075	199	5950	242	8431
28	2468	71	3344	114	4219	157	5095	200	5971	243	8552
29	2489	72	3364	115	4240	158	5115	201	5991	244	8672
30	2509	73	3385	116	4260	159	5136	202	6011	245	8793
31	2529	74	3405	117	4281	160	5156	203	6032	246	8914
32	2550	75	3425	118	4301	161	5176	204	6052	247	9034
33	2570	76	3446	119	4301	162	5197	205	6072	248	9155
34	2590	77	3466	120	4342	163	5217	206	6093	249	9276
35	2611	78	3486	121	4362	164	5238	207	6113	250	9397
36	2631	79	3507	122	4382	165	5258	208	6133	251	9517
37	2652	80	3527	123	4403	166	5278	209	6154	252	9638
38	2672	81	3548	124	4423	167	5299	210	6174	253	9759
39	2692	82	3568	125	4443	168	5319	211	6195	254	9879
40	2713	83	3588	126	4464	169	5339	212	6215	255	10000
41	2733	84	3609	127	4484	170	5360	213	6235		
42	2753	85	3629	128	4505	171	5380	214	6256		

7.5 RDM Templates*

The ROXX NEOi mini features support for various RDM functions. RDM (Remote Device Management) is a protocol enhancement to USITT DMX512 that allows bi-directional communication between the fixtures and the controller over a standard DMX line. This protocol will allow configuration, status monitoring and management. You will need a RDM controller to get control over the supported parameters. See the tables below for supported RDM features.

Label:	ROXX NEOi mini
Model:	NEOi mini
Manufacturer:	ROXX
ID:	6A6Ah
Device ID:	0138 xxxx

***Note:** During RDM identifying process NEOi mini flashes white to blue color alternately.

RDM functions

For easy identifying ROXX NEOi mini during RDM process the unit will jump from white color to blue color every second.

PID	Function	Action	Values
0x00F0	DMX Start Adress	Set	001-512
0x00E0	DMX Personality	Set	DMX modes
0x00E1	DMX Slots	Read	Channels
0x8010	Fan Mode	Set	1= Auto 1 / 2= Auto 2 / 3= Silent / 4= Studio / 5= Fan Off / 6= Max. Power
0x0345	Dimmer Curve	Set	1= Linear / 2= Exponential / 3= Logarithmic / 4= S-Curve
0x0345	Dimmer Response	Set	1= LED / 2= Halogen
0x8032	Redshift	Set	0= Off / 1= On
0x8033	Color Calibration	Set	0= Normal CRI / 1= High CRI
0x8034	RAW Balance	Set	0= RAW / 1= User Calibration
0x8035	User Calibration- Red	Set	000-255
0x8036	User Calibration- Green	Set	000-255
0x8037	User Calibration- Blue	Set	000-255
0x8038	User Calibration- Lime	Set	000-255
0x0347	LED Frequency (PWM)	Set	1= 800Hz / 2= 1200Hz / 3= 2000Hz / 4= 3600Hz / 5= 12kHz / 6= 25kHz
0x0142	Startup Mode	Set	0= DMX / 1= AUTO FX / 2= Editor / 3= Color Macro / 4= Quick Color / 5= Tunable White / 6= User Color
0x0141	DMX Fail	Set	1= Hold / 2= Blackout / 3= Emergency
0x8012	Display Backlight	Set	0= Off / 1= On
0x8013	Display Auto Flip	Set	0= Off / 1= On
0x0641	Display Lock	Set	0= Off / 1= On
0x8018	CRMX Operating Mode	Set	0= RX / 1= TX
0x8019	CRMX Receive Reset	Set	0= No / 1= Yes
0x801A	CRMX Transmit Link	Set	0= No / 1= Yes
0x801B	CRMX Pass to DMX out	Set	0= No / 1= Yes
0x801C	Bluetooth	Set	0= Off / 1= On
0x801D	Bluetooth Link	Set	0= No / 1= Yes
0x8048	Protocol	Set	1=DMX / 2= Slave
0x801E	Factory Reset	Set	0= No / 1= Yes
0x801F	User Reset	Set	0= No / 1= Yes

0x00C0	Firmware Version	Read	n.a.
0x00D3	Serial Number	Read	n.a.
0x0400	Device Power on Time	Read	n.a.
0x0401	LED on Time	Read	n.a.
Sensor1	LED Temperature	Read	n.a.
Sensor2	Fan Speed	Read	n.a.

* For more and detailed information about the different reset options please refer to chapter "5.4.6.1 Reset functions"

Sensors

RDM enables various readouts for remote device monitoring. See the table below for sensors and sensor types. Please note: The RDM controller communicates with the fixtures to show only the available sensors for this fixture. The table is subject to change without notice.

Name	
Temperature	xx°C / xxx°F
Software Version	SW-Version
Errors	

8. TROUBLESHOOTING

Did you try turning the device off and on again?

Problem	Reason	Solution
Device is not responding.	No power.	Check cable connections and conform that power is switched on.
	Fuse defect.	Contact your qualified service technician / manufacturer.
Device has turned off.	Power failure or power was turned off.	Check power supply, fuse, connections, switches.
Device has stopped responding.	DMX cable correct?	Check cables.
	Wireless connection got cut off.	Check wireless transmitter and connection signals.
Device operates strangely.	DMX cable inverted (pins correct?)	Use a phase inverter or different cables.
	DMX cable terminated?	If not, install DMX termination at the end of the cable.
	Stand Alone program running?	Stop internal Stand Alone.
No Bluetooth Connectivity	No Bluetooth Connectivity	Please make sure your mobile device is inside the connectivity range of maximum 10-15m.
	Bluetooth is disabled at your mobile device	Please enable Bluetooth at your mobile device settings.
	Mobile device has wrong Bluetooth Pin	Please use same Bluetooth Pin to connect ROXX APP with the fixture. Current BLE Pin can be read out inside fixture's wireless DMX settings.
	Mobile device has different Bluetooth connectivity	As only one Bluetooth connectivity can be active, please make sure your mobile device is currently not connected to some other devices.
	Different mobile device is still connected to the fixture	Please disconnect other mobile device from fixture.
	No Bluetooth Advertisement	Please send new BLE advertisement by enable "BLE Link" inside Settings of the fixture.
	Bluetooth module has hang up	Please enable Factory Reset at the fixture to re-start the Bluetooth module.

9. MANUFACTURER'S DECLARATION

Manufacturer's Warranty & Limitations of Liability

Please find our warranty conditions and limitations of liability inside our manufacturer's declaration at www.roxxlight.com/support

Requesting Warranty-Service

To request warranty service for your product, please contact:

ROXX GmbH,

Hansestr. 91, 51149 Köln

Email: info@roxxlight.com or the ROXX authorized reseller in your country, from where you purchased your product.

Correct Disposal of this product



This is for the European Union and European countries with electrical waste collection systems. When this label is shown on the product or brochure it means that the item cannot be disposed with household waste. In order to prevent damage to the environment or human health please do not dispose this product uncontrolled. Make sure to act responsible, recycle this product separately from other types of waste to enable lasting reuse of resources. Private users please contact the retailer where you purchased this product or your local authorities to find out where and how proper recycling of this item is possible. Business users please contact your supplier or check the terms and conditions of your purchasing contract. Make sure not to mix this product with other commercial waste.

FCC Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

CE Compliance

The equipment marketed by ROXX GmbH complies (where applicable) with the essential requirements and other specifications of the following Directives:

- 2014/53/EU (RED)
- 2014/30/EU (EMC)
- 2014/35/EU (LVD)
- 2011/65/EU (RoHS)

The complete EU- and UK-Declaration of Conformity can be found at www.roxxlight.com/support, or you can also request it at info@roxxlight.com

