



CLUSTER B4 FC

- 4 x 300W Full Color
- RGBA + Warm White LED's
- C-Lok Cluster System
- Magnetic Pre-Link system




All CLUSTER products can be easily connected both horizontal and vertically, by using the integrated C-Lok system. The series is made to enable toolless multiple array configurations, scalable from a single vertical line, to massive matrix like arrays. Due IP65 rating all products are outdoor ready and protected from ingress of dust and rain. There are several mounting options – Camlock mounts on top and back enable the use of Omega-Brackets, Yokes can be attached to mounting points on all sides, or the internal C-Lok system can be used for seamless inter-connection. Pre-Link Magnets on top and side help to align the fixtures, giving an incredible user-friendly operation and save interlocking. A specially designed rigging bracket is used for seamless connection of multiple Blinders, to avoid gaps due to bracing of the truss structure by variable, sliding mounting positions. Floor extensions can be used to create vertical structures in single or double rows.

The Full Color version reproduces the same look by using it's warmwhite LED's in combination with RGB and Amber, plus the full range of user adjustable color mixing and tunable white.

Accessories



Line Array
(Flybar)



Line Array
(Floor Bracket)




Yoke 4.2
(Included)



Yoke 4.3
(Optional)



Omega Bracket



Floor Extension



Rigging Bracket G2



Floor Bracket



Cases

Technical Data

Photometrics	
LED expected lifetime	50.000 hours
Lightsource	4x 300W Red, Green, Royal Blue, Amber, Warm-White
Type of optical system	Reflector with Compound Eye Lens
LED PWM Frequency	selectable 800Hz, 1200Hz, 2000Hz, 3600Hz, 12kHz, 25kHz
Beam angles (50%)	50°
Maximum Field angles (10%)	87°
Color temperature range	2.000-10.000K
Efficancy (max)	22,62 lm/W
CRI/RA	90 @ 5600K / 86 @ 2900K
Luminous flux	28.300 lm
illuminance Lux @ 1m / 3,3ft (@ 2900K)	33265lx / 3090fcd
illuminance Lux @ 3m / 9,8ft (@ 2900K)	3695lx / 343fcd
illuminance Lux @ 5m / 16,4ft (@ 2900K)	1330lx / 124fcd
illuminance Lux @ 7m / 23,0ft (@ 2900K)	675lx / 63fcd
illuminance Lux @ 10m / 32,8ft (@ 2900K)	333lx / 31fcd
Thermal Characteristics	
Cooling	Active, Forced Air, Temperature-regulated
Humidity (max.)	95%
Temperature range, Operating	-40°C to 45°C
Temperature range, Start-up	-20°C to 45°C
Temperature range, Storage	-40°C to 80°C
Thermal Protection	Automatic overtemperature protection
Electrical Data	
AC Power, max	90 – 285V 50/60Hz
AC Power, nominal	100 – 240V 50/60Hz
Electrical protection	Overload protection with automatic recover
Max power consumption	1250W
Constant power consumption	400W
Power Max. Out	9A @ 230V / 2A @ 120V
Power Linking @ Max Power Consumption (Boost Mode)	1 unit @ 230V / 0 unit @ 120V
Power Linking @ Constant Power Consumption (Illumination Mode)	7 units @ 230V / 2 units @ 120V
Power Factor	0.925 PF (230V) / 0.993 PF (120V)
Power Supply Unit	Inbuilt auto-ranging electronic switch-mode
Operator & Controller	
DMX Functions	Master Dimmer, Master Dimmer Fine, Shutter, Duration, Dimmer 1-4, Dimmer 1-4 Fine, Red 1-4, Red 1-4 Fine, Green 1-4, Blue 1-4, Blue Fine 1-4, Amber 1-4, Warm-White 1-4, CTC 1-4, Tint 1-4, Color Macro 1-4, Color Macro Crossfade 1-4, Effect, Dimmer Curve, Dimmer Response, Redshift, Device Settings
DMX channels	1CH DWE, 2 CH DWE, 4-1CH DWE, 4-2CH DWE, 9CH DWE+, 8CH STROBE, 12CH RGB, 10CH BASIC RGB, 14CH BASIC RGB, 21CH SECTION RGB, 21CH STANDARD RGB (default), 22CH Comp RGB, 38CH STANDARD RGB, 40CH EXTENDED RGB, 57CH EXTENDED RGB, 20CH DIRECT, 12CH DIRECT, 29CH DIRECT, 48CH DIRECT, 73CH DIRECT
DMX modes	20
Protocol	USITT DMX512A RDM ANSI E1.20
Setting and addressing	OLED graphical display / 4 controls RDM ANSI E1.20

Operator & Controller

Standalone mode Auto Program, Editor, Color Macro, Quick Color, Tunable White, User Color, Timer

Wireless DMX n.a.

Indicator OLED graphical display

Controls 4 touch sensitive, backlighted controls

Strobe 0-20Hz

DMX I/O IP65 XLR 5-pin male/female

Power In TRUE1 compatible input & link-thru sockets

USB Firmware Update IP65 USB socket

Dimensions & Weight

IP class IP65

IK class IK08

Body material Aluminum, Nylon

Lens material Tempered glass front

Net dimensions (w x h x d) 400 x 400 x 191mm

Net dimensions inches 15,75 x 15,75 x 7,52 inches

Net weight (incl. Yoke) 16,2 kg (35,71lbs)

Tilt 360°

Tilt Locking System Locking system with toothing and angle indicator

Included / Optional

Included items Yoke 4.2, 2m Power Cable, Puk

Optional Accessories Yoke 4.3, Yoke Floor Extension, Rigging Bracket G2, Omega Bracket ST, Floor Bracket, CLUSTER Line Array Fly Bar, CLUSTER Line Array Side Bracket Set, CLUSTER Line Array BackBone 4, CLUSTER Line Array Backbone 2+2, CLUSTER Line Array Floor Bracke

Color options Black – RAL 9004 (Standard)
Custom color – any RAL (on request)

Installation

Mounting point by Yoke (included) 3x 13mm / 1/2" holes, 1x centric TV Spigot attachment, 3x integrated Camlocks for Omega Brackets

Mounting point on fixture 1/4 turn Omega Bracket on top and rear side

Mounting point with otional Rigging Bracket 2x 13mm / 1/2" holes for Clamp fixation




Orientation Any

Rigging possibilities Hanging or ceiling / pendant mount

Safety features 2x rear mount for safety wire


Minimum distance from flammable materials 0,3 meters (11,8 inch)

Technical Drawing

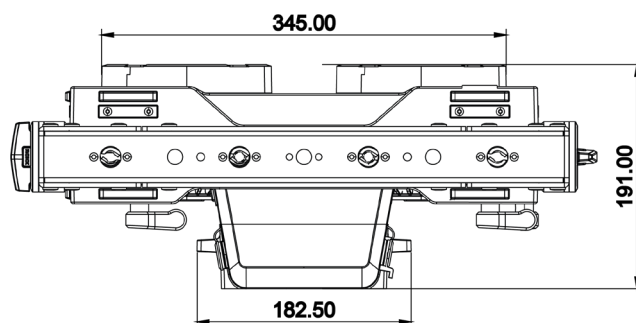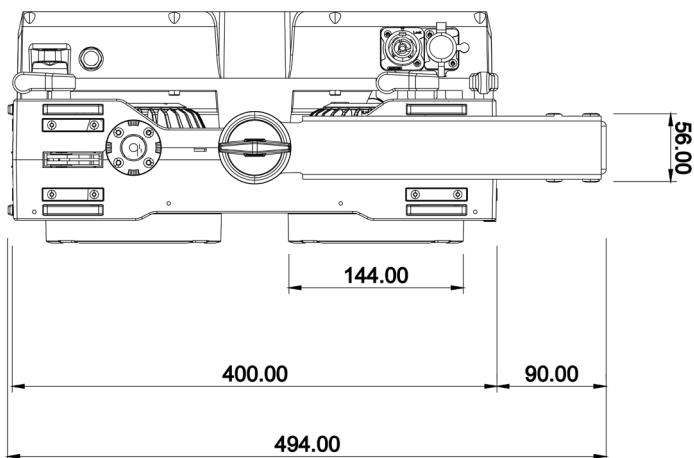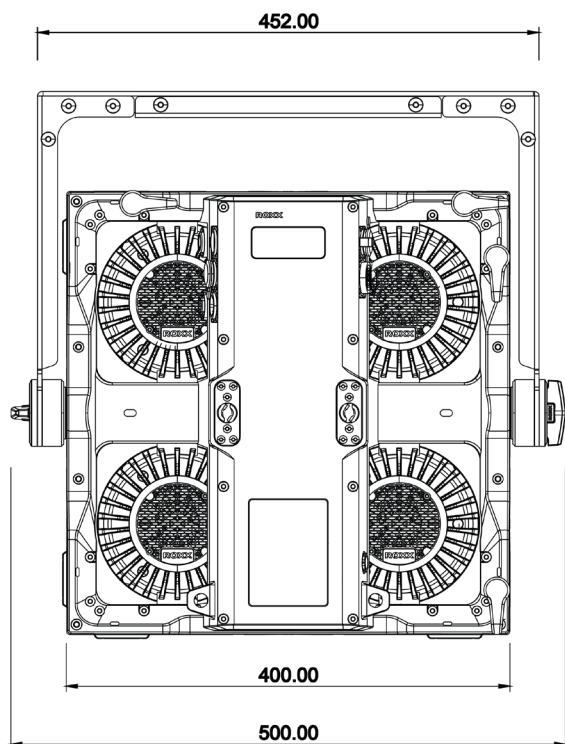

Luminaire Photometrics

B4 FC (@ 2.900K)

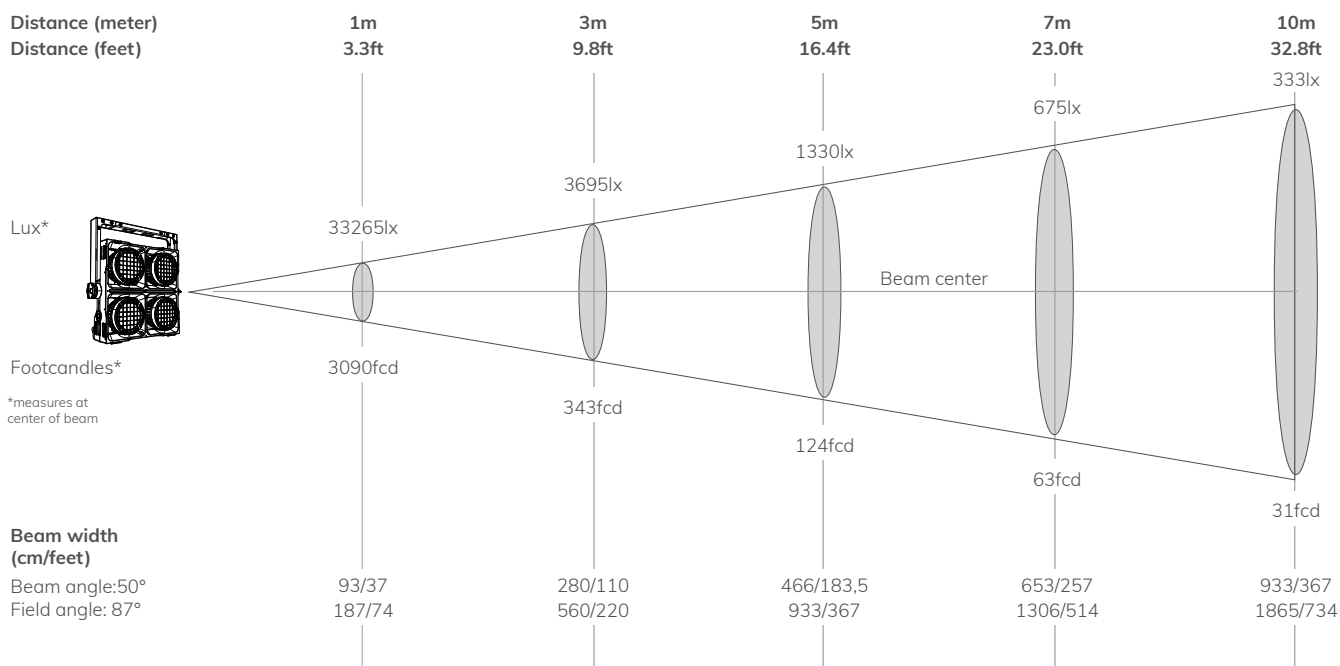

Order Number

CLUSTER	Order Number
B2 FC	13202101
B4 FC	13204101
B2 W	13202001
B4 W	13204001
Accessories	Order Number
Yoke 2.2	13907001
Yoke 4.1	13907601
Yoke 4.3	13907101
Floor Extension	13907201
Rigging Bracket G2	13907411

Accessories	Order Number
Floor Bracket	13908501
Case 4 pcs. / 8 pcs.	13907411
Case 2 pcs / 4 pcs.	13907511
Omega Bracket	90900002
CLUSTER Line Array Flybar	13909501
CLUSTER Line Array Side Brackets	13909601
CLUSTER Line Array Back Bone 4	13909701
CLUSTER Line Array Back Bone 2+2	13909801
CLUSTER Line Array Floor Bracket	13909901

Further Versions



CLUSTER B4 W



CLUSTER B2 W



CLUSTER B2 FC

