




Report Summary




Measurements

Photometrical Parameter	Optical Parameters	Electrical Parameters
Fixture Output: 11818 lm / 336931 cd	Beam Angle (50%): 7,5°	AC Supply: 225 V / 50 Hz
Fixture Efficiency: 63 lm/W	Field Angle (10%): 13,7°	Power: 187,1 W
Intensity @ 5m: 13470 lx	Cutoff Angle (2,5%): 28,9°	Current: 0,887 A
Color Temperature: 5542 K		Power Factor: 0,94
CRI: 88,1		
CRI R9 Value: 44,3		
CQS: 87,2		
TLCI: 91		
TM-30 Rf: 88,2		
TM-30 Rg: 98,4		

Details

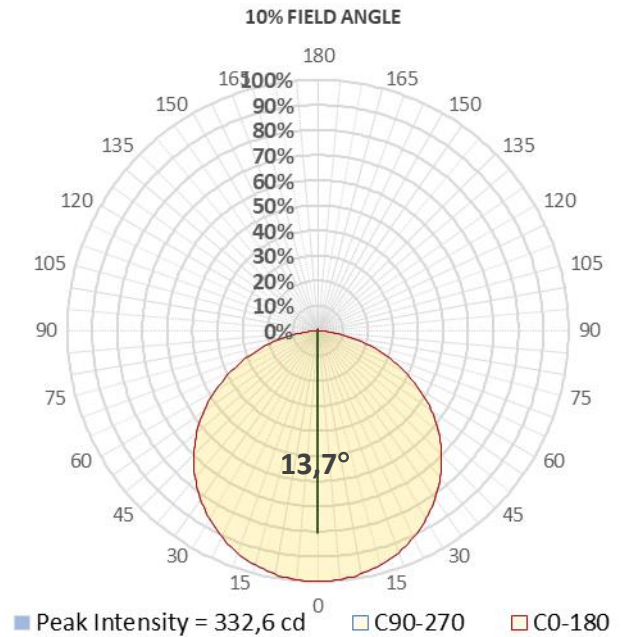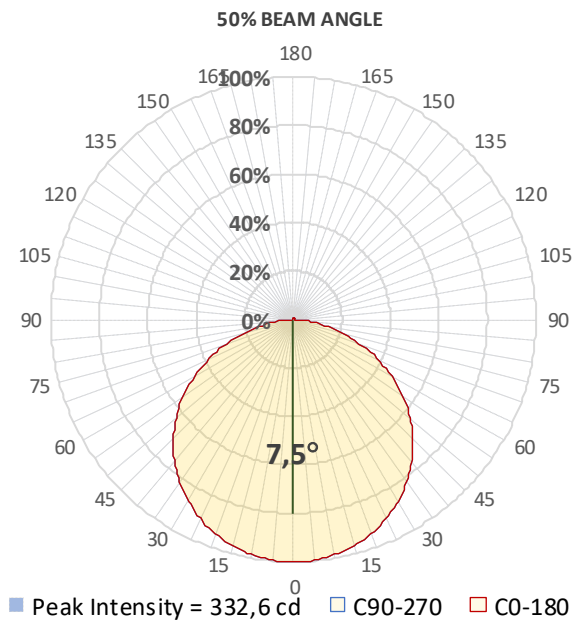

Spectral Distribution

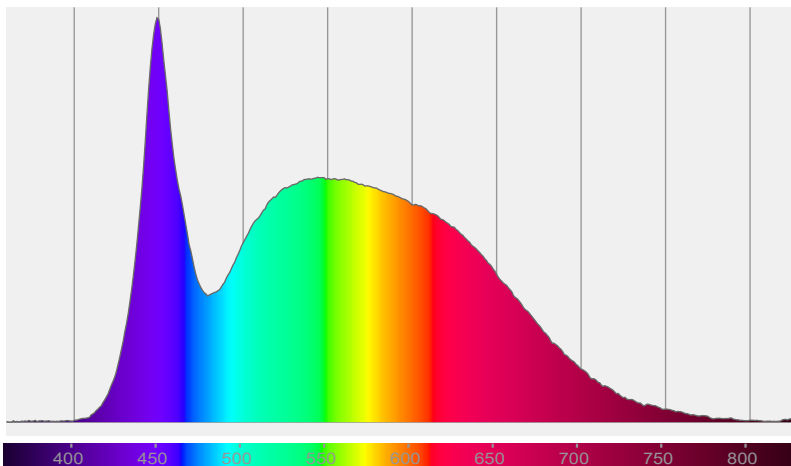

CIE 1931


x: 0,332 y: 0,348

Light Quality


CRI: 88,1

Color Temperature



5542 K

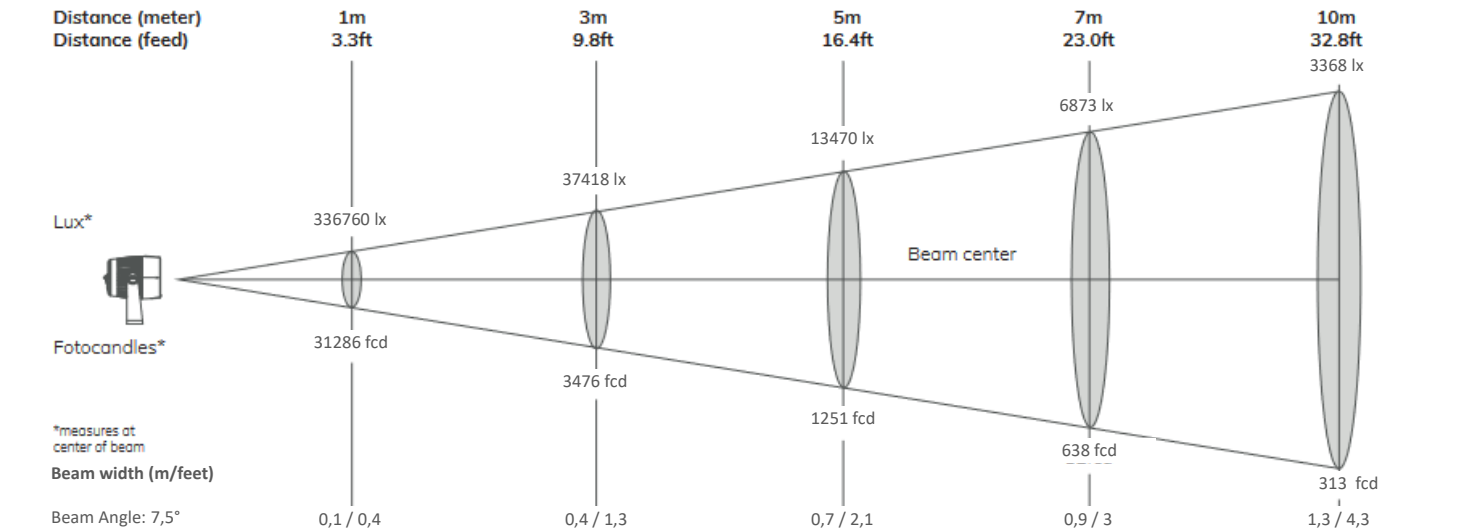

Angle	Distance									
	1m / 3.3ft		3m / 9.8ft		5m / 16.4ft		7m / 23ft		10m / 32.8ft	
	Lux Center lx/fcd	Diameter m/feet	Lux Center lx/fcd	Diameter m/feet	Lux Center lx/fcd	Diameter m/feet	Lux Center lx/fcd	Diameter m/feet	Lux Center lx/fcd	Diameter m/feet
Beam Angle: 7,5°	336760/ 31286	0,1/0,4	37418/ 3476	0,4/1,3	13470/ 1251	0,7/2,1	6873/ 638	0,9/3	3368/ 313	1,3/4,3

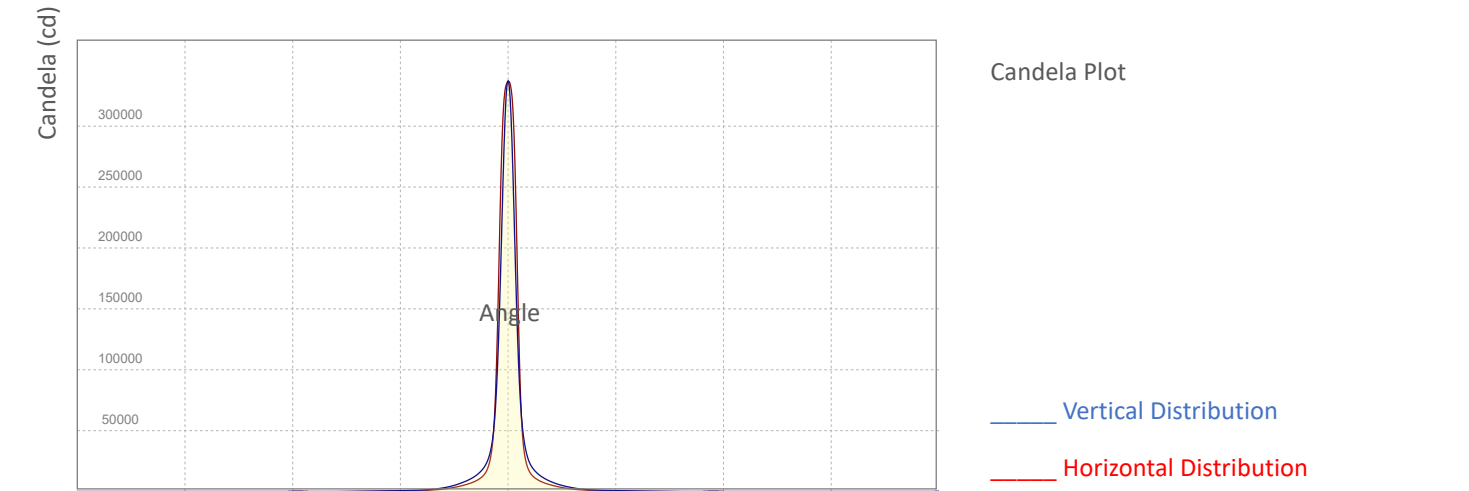


ISO Diagrams

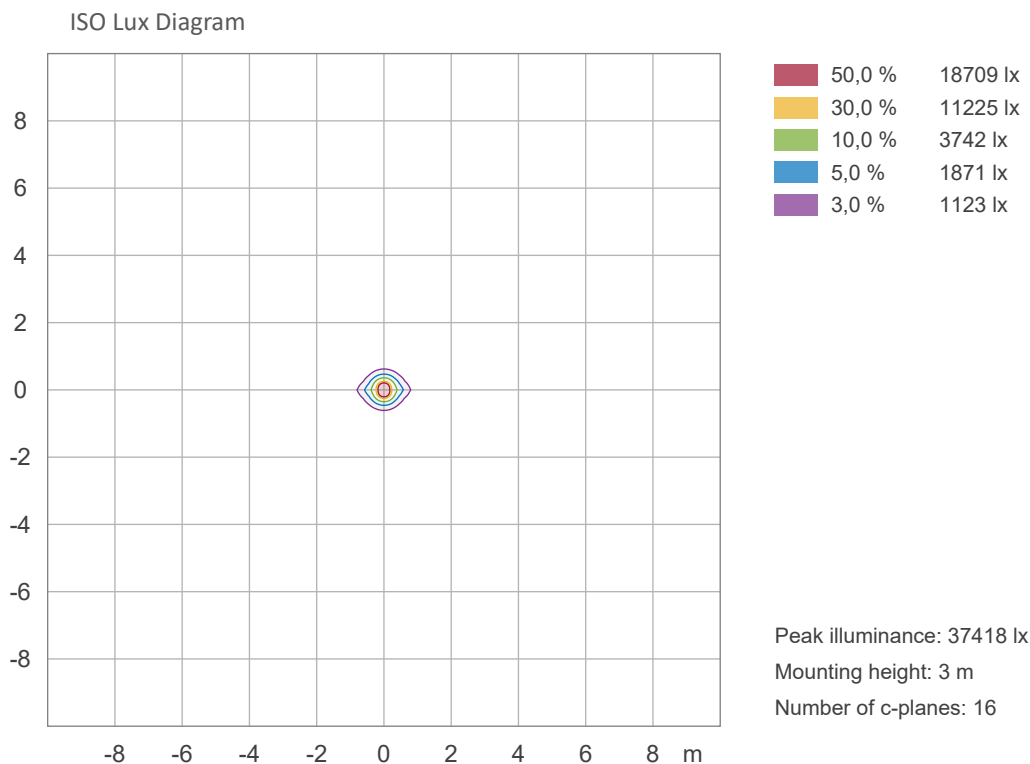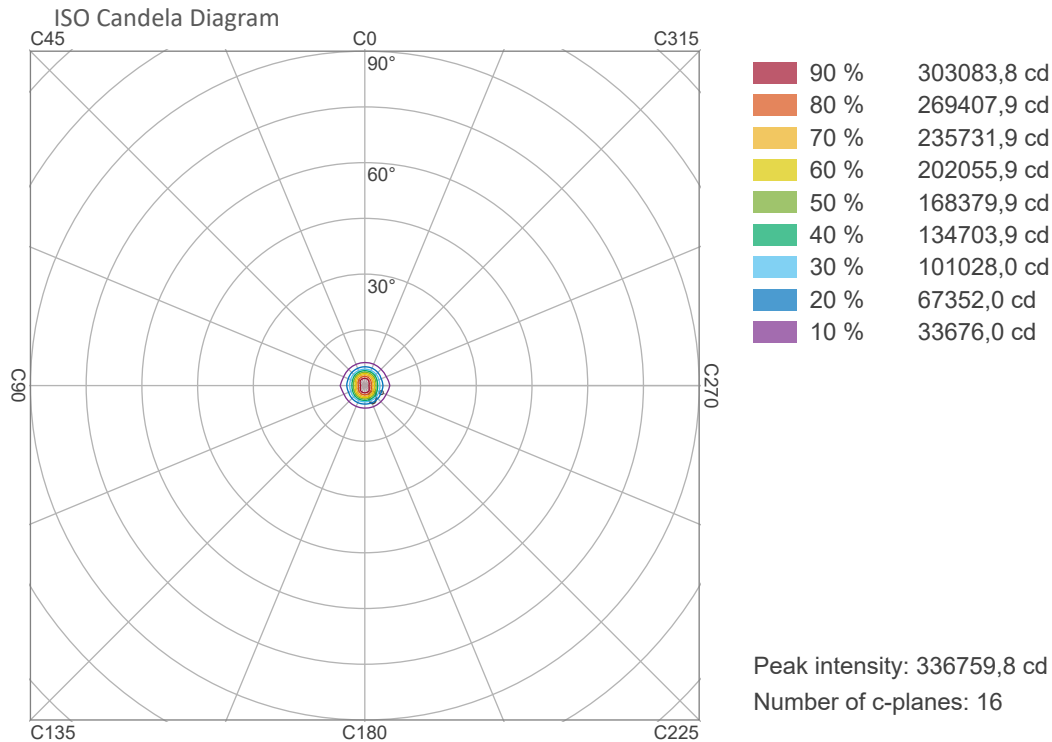


Chromaticity


CIE 1931

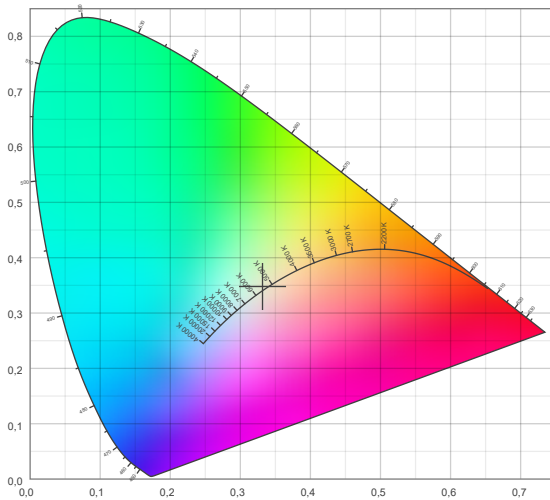


CIE 1931 - Zoom

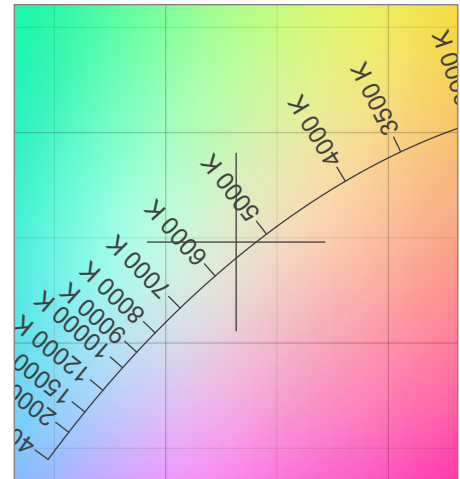

CRI: 88,1 (R1-R8)

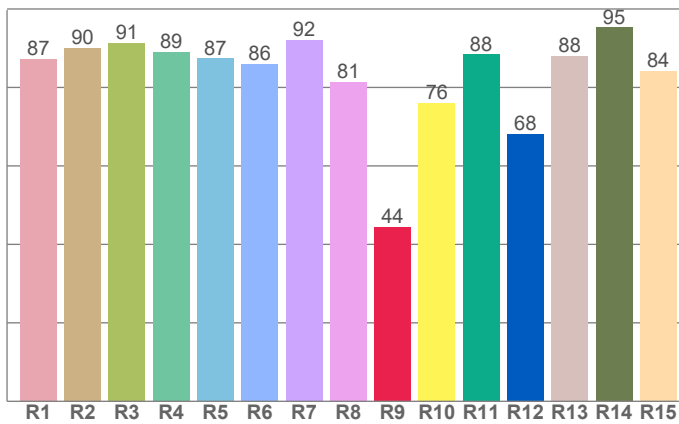

CQS: 87,2

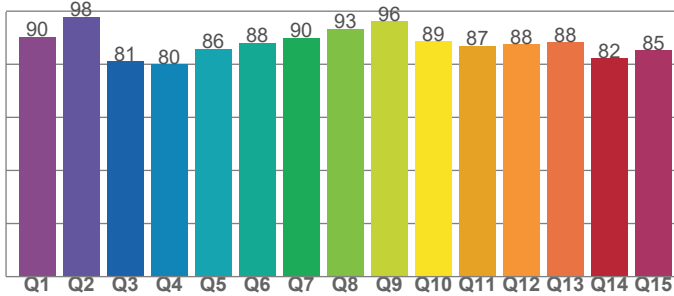

Color Temperature	Color Coordinate CIE 1931	Color Coordinate CIE 1931
CCT	x	y
5542K	0,332	0,348

Color Deviation Black Body Curve	Color Coordinate CIE 1964	Color Coordinate CIE 1964
Δuv	u	v
0,0039	0,204	0,321

Color Rendering Index	Red Component	Color Quality Scale
CRI	CRI – R9	CQS
88,1	44,3	87,2

Television Lighting Consistency Index	Color Fidelity	Color Gamut
TLCI	TM30 – Rf	TM30 – Rg
91	88,2	98,4


TM30 Details

Rf 88,2

Fidelity Index Rf



Rg 98,4

Gamut Index Rg

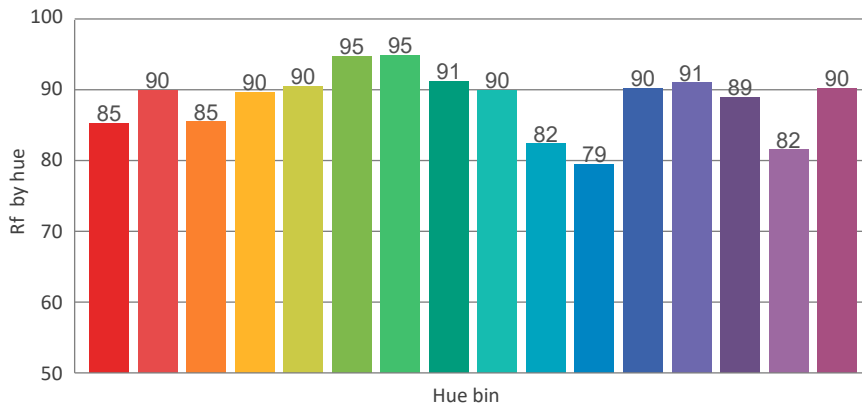


		Shifts (%)	
Hue Bin	Rf	Chroma	Hue
1		%	%
2		%	%
3		%	%
4		%	%
5		%	%
6		%	%
7		%	%
8		%	%
9		%	%
10		%	%
11		%	%
12		%	%
13		%	%
14		%	%
15		%	%
16		%	%

TM30_BIN_VALUES_END)

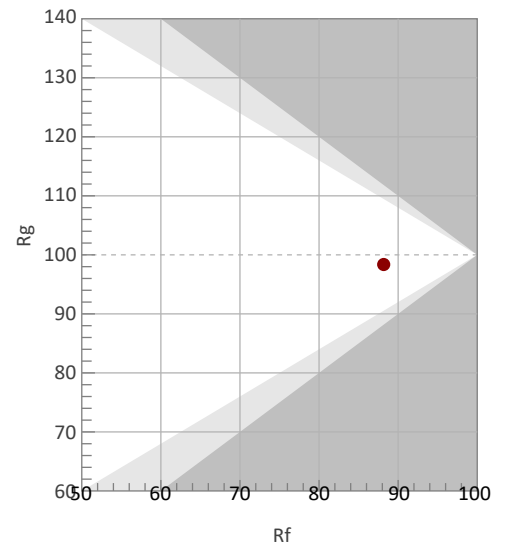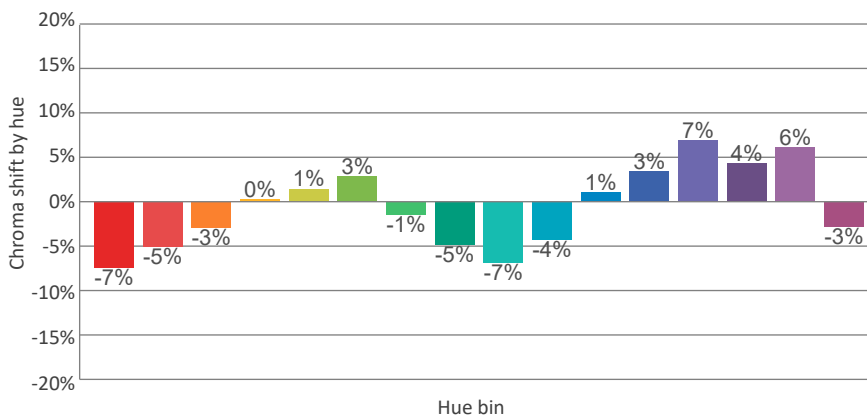

Color Vector Graphics

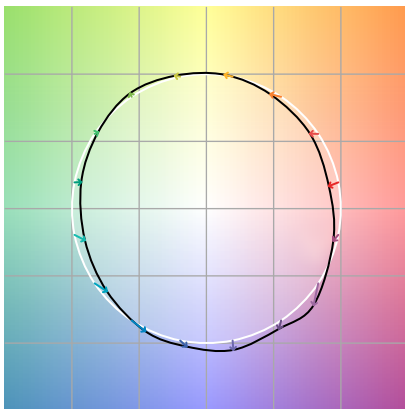

Color Distortion Graphics



Color Evaluation Sample

